

GEMS Relays and Barriers Render Any Non-Voltage Producing Sensor or Switch Intrinsically Safe

- ▶ Provide method of eliminating explosive conditions
- ▶ Rapid, arc-free response provides positive, non-mechanical operation
- ▶ Solid-state reliability assures consistent performance
- ▶ Low-power switching; a few milliamps of current controls high-power loads
- ▶ Completely encapsulated construction
Units are impervious to dust, moisture or foreign material
They are tamper-proof and shock- and vibration-resistant
- ▶ Modular housings for easier installation
- ▶ Exceptionally long, trouble-free service life

Intrinsic Safety and its Advantages.

Instrument Society of American Specification ISA-RP12.2 Defining Intrinsically Safe Equipment:

“Intrinsically safe equipment and wiring is equipment and wiring which is incapable of releasing sufficient electrical or thermal energy under normal or abnormal conditions to cause ignition of a specific hazardous atmospheric mixture in its most ignited concentration. Intrinsically safe terminations and wiring may be brought into any hazardous location of any Group classification for which it is accepted without requiring explosion-proof housing or other means of protection.”

To be certified “intrinsically safe,” a device or circuit must be so designed that no two simultaneous failures can cause an explosion. Intrinsically safe systems are more dependable. The I.S. circuit must function reliably per specifications, with no explosions, during and after cycling through a number of operations.

The units can also be installed more conveniently. Since no explosion is possible, no explosion-proof conduit or enclosures of any kind are needed in the hazardous area. Maintenance can be performed immediately as needed. And, intrinsically safe systems are more economical. Costly enclosures with their mounting requirements are unnecessary. No purging is required, thereby eliminating blowers, pressure switches, timers and relays.


SAFE-PAK® RELAYS: These intrinsically safe units amplify sensor load-handling capabilities in a wide diversity of AC and DC control switching applications.

Zener Barriers: These passive, energy-limiting devices, provide intrinsically safe DC outputs for a variety of sensors such as level and flow switches...level indicating transducers and transmitters...and many others. The maximum energy possible at the switch terminals of the SAFE-PAK and Zener Barriers is far below the explosive point of the most volatile surrounding gas conditions. The type of non-voltage-producing switch or sensor best suited for the application can be utilized, since the entire switching circuit is rendered intrinsically safe by the SAFE-PAK or Zener Barrier. As the switching circuit is low voltage, there is no shock hazard to operating or maintenance personnel.



Typical Applications

Switches Located in Hazardous Areas

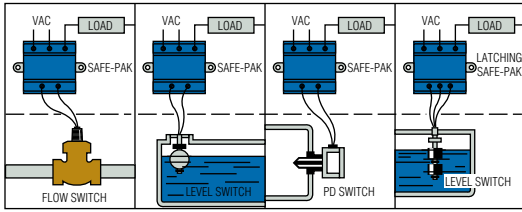

Important points to remember when selecting Zener Barriers and Safe Pak® :

- The maximum input voltage rating of the barrier must be higher than your power supply. (i.e., a 24 VDC supply would require a 30 V barrier.)
- Make sure the barrier is rated for your hazardous area class, division, and group.

Intrinsic Safety Approvals – Safe-Pak® Relays and Zener Barriers

Model	Part Number	Approvals		Hazardous Locations							Page Number		
		UL	CSA	Class	Division	Group							
						A	B	C	D	E		F	G
SAFE-PAK®	22445	•	•	I, II	1, 2	•	•	•	•	•	•	•	L-4 and L-5
	25872	•	•			•	•	•	•	•	•	•	
	25873	•	•			•	•	•	•	•	•	•	
	64101	•	•			•	•	•	•	•	•	•	
	144600	•	•			•	•	•	•	•	•	•	
Programmable SAFE-PAK®	54820	•	•	I, II	1, 2	•	•	•	•	•	•	L-6 and L-7	
	54825	•	•			•	•	•	•	•	•		
	54845	•	•			•	•	•	•	•	•		
Zener Barriers²	54801	•	•	I, II	1, 2				•			L-10 and L-11	
	54803	•	•			•	•						
	54805	•	•			•	•						
	54806	•	•							•			
Zener Barriers²	111950	•	•	I, II	1, 2	•	•	•	•	•		L-8 and L-9	
	111952	•	•			•	•	•	•		•		
	111954	•	•			•	•	•	•		•		
	111956	•	•			•	•	•	•		•		
	113000	•	•					•	•	•			•
	114072	•	•					•	•	•			•
	114074	•	•					•	•	•			•
	114166	•	•			•	•	•	•				•
114175	•	•			•	•	•		•				

Notes:

1. Certified intrinsically safe under MSHA certification No. 1662 for use on permissible equipment. For Group D use only.
2. Zener Barrier models, Part Numbers 54801, 54803, 54805, 54806; Programmable SAFE-PAK models, Part Numbers 54820, 54825, 54845 are certified by CSA for mounting inside a suitable enclosure in Division 2 or non-hazardous locations and must be connected by means of the two studs provided to grounded copper busbar or equivalent.

For information on non-intrinsically safe holding relays and switching units, see Pages L-12 and L-13.

MSHA — Bureau of Mines




UL — Underwriter's Laboratories, Inc.



CSA — Canadian Standards Association

Installation and Maintenance

SAFE-PAK and Zener Barrier units are installed in a safe area and connected to the sensor in a hazardous location...no explosion-proof or protective housings of any kind are needed. Units install singly, in any position...or can be grouped on a common, earth-grounded plate with mounting tabs to provide electrical grounding. No. 6-32 threaded electrical terminals are conveniently placed atop the unit housings. Barriers and relays may be grouped on a common, earth-grounded mounting plate. Intrinsically safe sensor wiring must be separated from non-intrinsically-safe input wiring in separate conduits or raceways to prevent by-pass during testing or servicing.

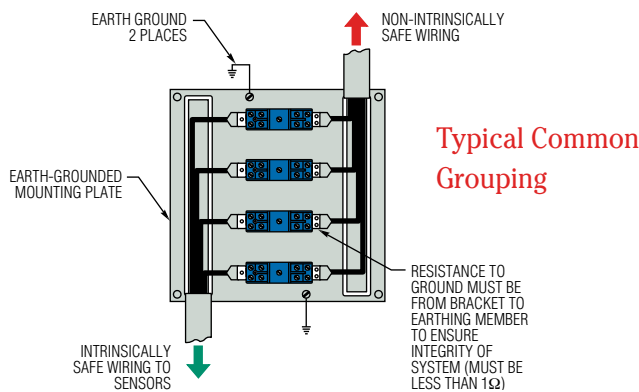

The only maintenance normally required is routine inspection approximately every two years or less to check integrity of earth-grounding and electrical connections, and to make sure the unit is clean.

GEMS SAFE-PAKS and Zener Barriers must be installed in conformance with the National Electrical Code and the INSTRUCTION, INSTALLATION AND SERVICE Bulletin supplied with all units. Periodic checks of ground bonding and cleanliness of units and terminals constitute the only maintenance required.

Warning

Misapplication of intrinsically safe products may result in injuries or damages. The circuit diagrams presented in this catalog are typical and may not represent your application.

Hazardous Locations as defined by the National Electrical Code Handbook. . .

The degree of hazard is normally indicated by a three-part designation: "Class-, Division, and Group-." Class I, Division 1, Group A denotes the most severely and continually hazardous condition.

Class I Locations — Are those in which flammable bases or vapors are or may be present in the air in quantities sufficient to produce explosive or ignitable mixtures.

Class II Locations — Are those which are hazardous because of the presence of combustible dust.

Class III Locations — Are those which are hazardous because of the presence of easily ignitable fibers or flyings, but in which such fibers or flyings are not likely to be in suspension in air quantities sufficient to produce ignitable mixtures.

Division 1 — Locations in which hazardous concentrations in the air exist continuously, intermittently, or periodically under normal operating conditions.

Division 2 — Locations in which hazardous concentrations are handled, processed, or used, but are normally confined within closed containers or closed systems from which they can escape only in case of accidental rupture or breakdown.

Group A — Atmospheres containing acetylene.

Group B — Atmospheres containing hydrogen, or gases or vapors of equivalent hazard, such as manufactured gas.

Group C — Atmospheres containing ethyl-ether vapors, ethylene or cyclopropane.

Group D — Atmospheres containing gasoline, hexane, naphtha, benzene, butane, propane, alcohol, acetone, benzol, lacquer solvent vapors or natural gas.

Group E — Atmospheres containing metal dust, including aluminum, magnesium, and their commercial alloys and other metals of similarly hazardous characteristics.

Group F — Atmospheres containing carbon black, coal or coke dust.

Group G — Atmospheres containing flour, starch, or grain dusts.

Intrinsically Safe SAFE-PAK® Relays Amplify Sensor Load-Handling Capabilities

Costly explosion-proof enclosures with their mounting requirements are unnecessary. No purging is required.

SAFE-PAK: Less than 100 microamps at 9 VDC actuates the unit to control loads to 5A at 120 VAC. Resistive (up to 100,000Ω) or short-circuiting sensors operate the unit. 120 VAC and 240 VAC model.

Low Sensitivity SAFE-PAK: Sensor closures up to 1000Ω resistance control resistive loads to 5A at 120 VAC. 120 VAC, N.O. model.

See table on Page L-2 for specific approval information.




P/N
22445
25872
25873
64101



P/N
144600



Dimensions

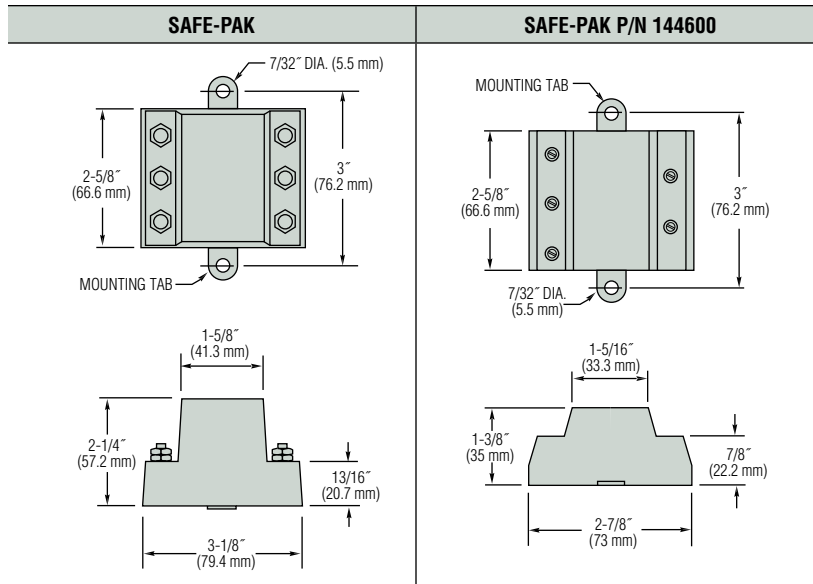

How To Order

Select Part Number based on Relay Style, Operating Voltage and Switch Operation required.


Relay Style	Operating & Load Voltage Range	Load Current Maximum	Turn-On Sensitivity (Typical) ¹	Turn-Off Sensitivity (Typical) ¹	Voltage Loss	Operating Temperature Range	Output Leakage Current Maximum	Switching Operation	Part Number
SAFE-PAK®	95 to 135 VAC	5A	400 K	1 M	2 VAC	0°F to +120°F (-17.8°C to +48.9°C)	6 mA @ 120 VAC	SPST N.O.	22445 ⁵ ⚡
	100 to 135 VAC						6 mA @ 120 VAC	SPST N.C.	25872 ⁵ ⚡
	200 to 250 VAC						12 mA @ 250 VAC	SPST N.O.	25873 ⚡
Low Sensitivity SAFE-PAK®	110 to 130 VAC	.5A @ 20 VAC ² .05A @ 200 VAC ²	300	1000	—	-10°F to +140°F (-23.3°C to +60°C)	0	SPST N.O.	64101 ⚡
	105 to 125 VAC	5A	500	2000	2 VAC	-40°F to +120°F (-40°C to +48.9°C)	6 mA @ 120 VAC	SPST N.O.	144600 ⚡

Notes:

- Temperature Dependent.
- 50-60 Hz
- All AC voltage and current specifications are RMS values unless otherwise stated.
- Housing material is Polysulfone.
- Certified intrinsically safe under MSHA certification No. 1662 for use on permissible equipment. For Group D use only.


⚡ – Stock Items.

Typical Wiring Diagrams

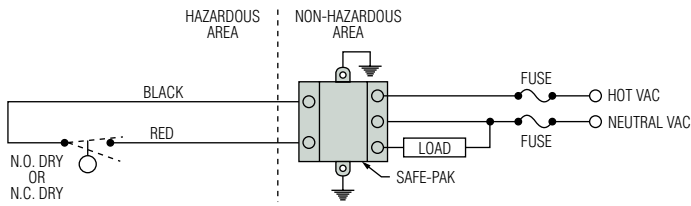

SAFE-PAK, Part Numbers 25872, 25873, 64101 or 144600 with sensor switch in hazardous location.

Transient Protection for SAFE-PAK (AC Loads) Use a properly sized metal oxide varistor (MOV) as shown below.

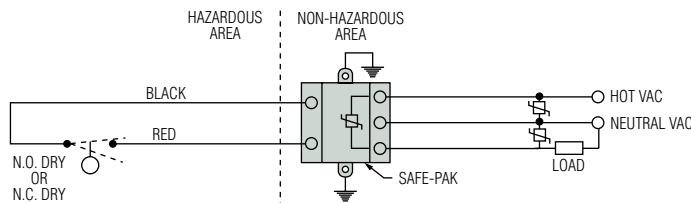

Installation and maintenance must be in accordance with the National Electrical Code and the applicable GEMS INSTRUCTION, INSTALLATION and SERVICE bulletin available at www.gemssensors.com

Define Switching Mode Anytime With Programmable SAFE-PAK® Relays

Provide normally open (N.O.), normally closed (N.C.) or latching output with variable time delays

- ▶ Designed for use with switches or sensors monitoring flow, pressure, level, etc
- ▶ They render non-voltage-producing sensors intrinsically safe for operation in potentially hazardous areas
- ▶ Streamlined housing suited for group-mounting on a common earth-grounded plate for multiple installation
- ▶ UL recognized, CSA and evaluated by MSHA


Operations such as normally open, normally closed or latching are programmed into these versatile SAFE-PAK units by the user during installation. Selection is made by simply connecting sensor wiring (and jumper wire when required) to the proper terminals on the unit as diagrammed on opposite page. All units are programmable, except where otherwise indicated.

See table on Page L-2 for specific approval information.


Options

SAFE-PAK Relays can be supplied with any of the following options on special order. Please consult factory.

- With optically isolated operation
- With zero-crossover load switching
- Longer time delays
- Rail-mounting clip (in addition to standard mounting tabs)




Dimensions

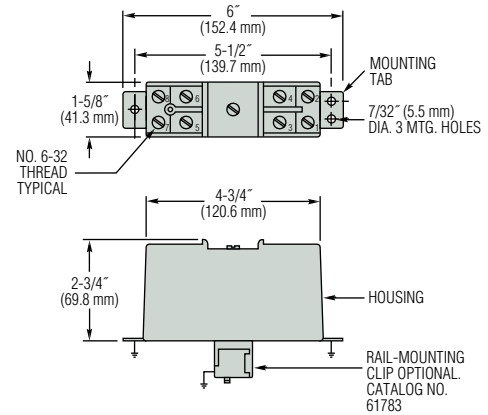

Protective Cover

Assures intrinsic safety integrity of sensor terminals and wiring.



Specifications

Part Number	Operating Voltage ⁴	Load Current Maximum	Load Voltage Range	Turn-On Sensitivity (Typical) ¹	Turn-Off Sensitivity (Typical) ¹	Leakage Current "Off" State, Maximum	Voltage Loss, Maximum	Transient Current ³	Operating Temperature Range
54820 ⚡	95 to 125 VAC, 50-60 Hz	2A	25-250 VAC 50-60 Hz	≤400 K	1 M	3 mA	2 V	20A	+32°F to +140°F (0°C to 60°C)
54825 ⚡		0.5A @ 20 V .05A @ 200 V AC or DC	0-250 VAC 50-400 Hz 0-200 VDC	≤30 K	60 K	—	—	—	

Notes:

1. Temperature Dependent.
2. Housing material is blue Lexan®.
3. Repetitive surge currents caused by transient voltage/current pulses may eventually cause permanent damage to triac-type switches if adequate transient suppression is not utilized.
4. All AC voltage and current specifications are RMS values unless otherwise stated.

⚡ – Stock Items.

How To Order

Specify Part Number based on output.


Description – Hybrid Relay	Switching Mode	Part Number
Triac Output, AC Operation	Programmable, N.O., N.C., or latching	54820 ⚡
Reed Switch Output, AC/DC Operation		54825 ⚡
Optional Rail Mounting Clip		61783

⚡ – Stock Items.


Programming the GEMS Programmable SAFE-PAK

Normally Open Load Operation: Switch closure to terminals 5 and 7 turns Programmable Relay “on” and energizes load. Same switch opening will turn “off” Programmable Relay and de-energize load. Terminals 6 and 8 are not used.

Typical Wiring

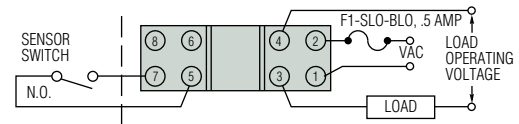


Normally Closed Load Operation: Switch closure to terminals 6 and 7 turns Programmable Relay “off” and de-energizes load. Same switch opening will turn “on” Programmable Relay and energize load. Jumper must be connected between terminals 5 and 7...terminal 8 is not used.

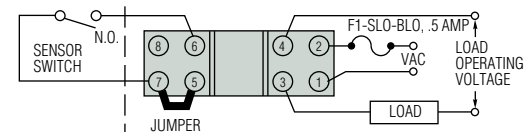


Latching “A” Operation: For refill control, momentary switch closure to terminals 5 and 7 turns Programmable Relay “on” and energizes load. Load remains “on” until the Programmable Relay turns “off” with a momentary switch closure at terminals 6 and 7. The load is then de-energized. Jumper must be connected between terminals 7 and 8. For pump-down, reverse wires on terminals 5 and 6.

Refill Operation Shown

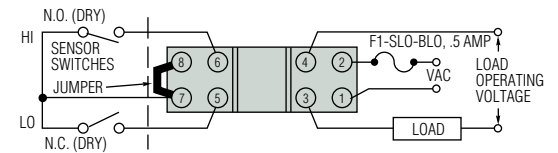

Note: Latching function should be accomplished on sensor input side of the Programmable SAFE-PAK. No latching function is advised on the output power circuit side.


Latching “B” Operation: Momentary switch closure to terminals 5 and 7 turns Programmable Relay “on” and energizes load. Load remains “on” until the N.C. switch terminals 7 and 8 opens. The Programmable Relay turns “off” and load is de-energized. Terminal 6 and jumper are not used.

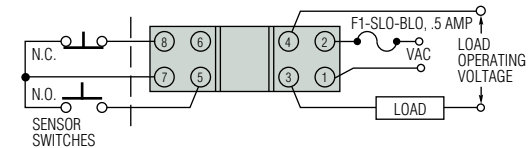


Note: Latching function should be accomplished on sensor input side of the Programmable SAFE-PAK. No latching function is advised on the output power circuit side.

Load Consideration

When these units are used in high-noise electrical systems, connection of a varistor (General Electrical G-MOV or equivalent diode) across terminals 3 and 4 is recommended. Consult factory for recommended varistor protection.

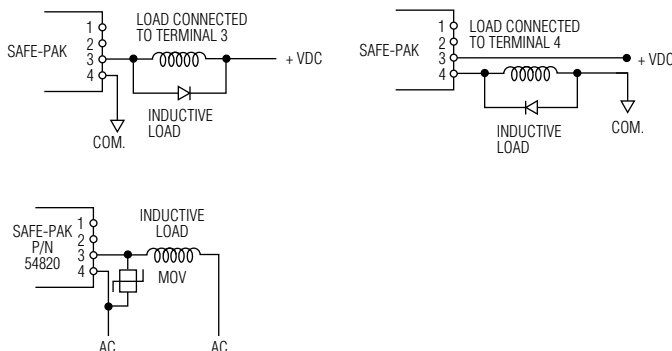

Connecting to Programmable Controllers

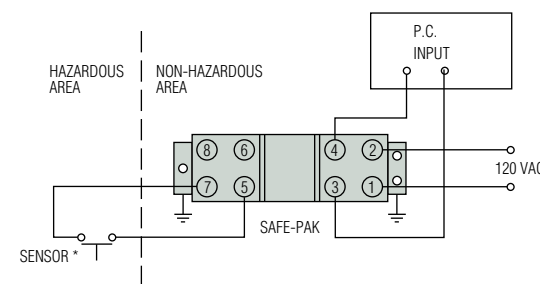

Programmable SAFE-PAK, P/N 54825, providing simple on-off functions for hazardous location, and interfacing with TTL or AC logic input of programmable controller. *Temperature, pressure, position, flow or level.

Installation and maintenance must be in accordance with the National Electrical Code and the applicable GEMS INSTRUCTION, INSTALLATION and SERVICE Bulletin available at www.gemssensors.com