

LD SERIES

Plastic Leak Detection Sensor

Order from:
C A Briggs Company
 622 Mary Street; Suite 101
 Warminster, PA 18974
 Phone: 267-673-8117 - 800-352-6265
 Fax: 267-673-8118
 Sales@cabriggs.com - www.cabriggs.com



- Floor Design
- Capacitive Fail-Safe Design
- Perfect for Aggressive and Electrically Conductive Corrosive Chemicals


PVC

PP

RoHS
 Compliant

CE

SERIES : LD

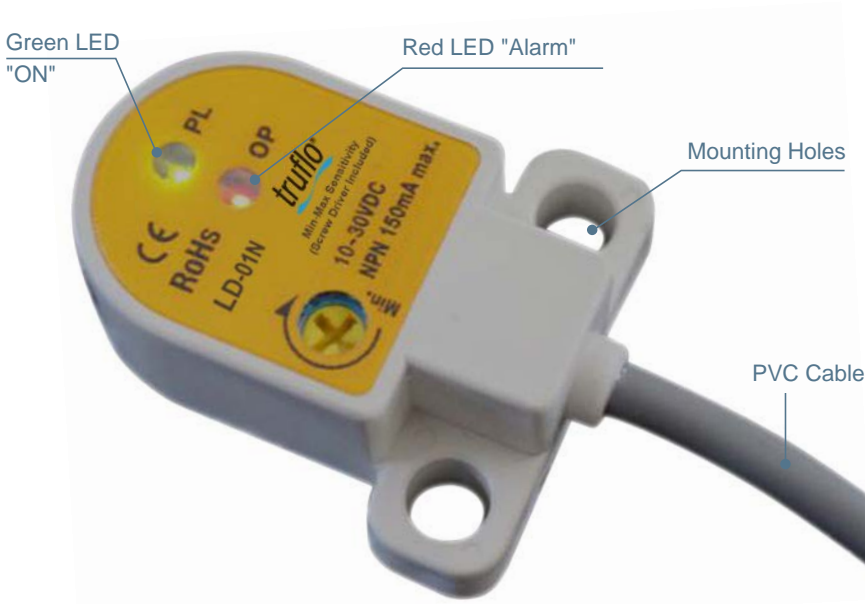

Corrosion Resistant

TECHNICAL FEATURES

SPECIFICATION	DESCRIPTION
Power Consumption	Approx. 3 W
Ambient Temperature	-20 to +60°C -20-140°F
Outputs:	<ul style="list-style-type: none"> • Switch : NPN,PNP maximum 150 mA • Switch [+AO / -AO]

APPLICATIONS

- ▶ **Containment Dikes**
- ▶ **Double Wall Tanks**
- ▶ **Leakage Basins or Container**
- ▶ **Computer Rooms**
- ▶ **Leaking Pumps**

CODE NUMBERS AND REFERENCES


Code	Description
LD-01N	Compact Leak Detector with 2m of Cable

PRINCIPLE

The LD Series is designed to detect conductive liquids providing a SSR relay Pulse Alarm.

- ▶ **NPN or PNP Pulse Relay Output**

INSTALLATION

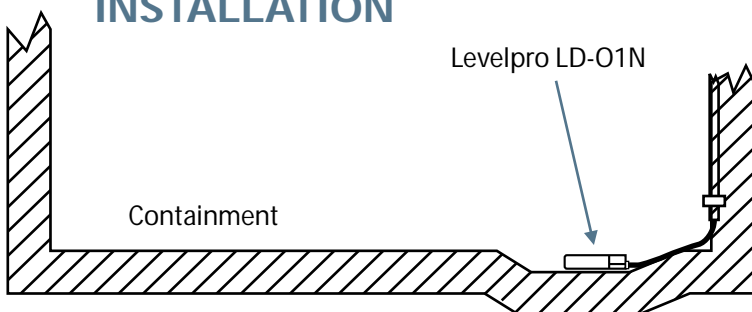

Dimensions

