


Level Switch



measuring
•
monitoring
•
analyzing

NKP

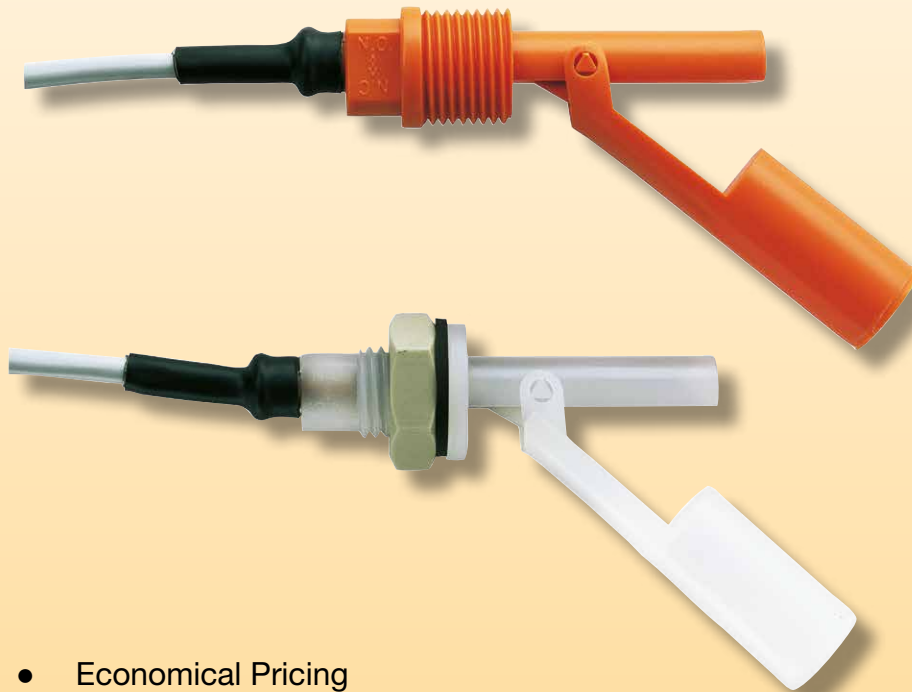

- Economical Pricing
- Excellent Chemical Resistance
- Compact
- Easy to Install
- Hermetically Sealed Reed Switch
- NEMA 6 Protection
- Ideal for Tanks with Inaccessible Tops or Bottoms



Order from: **C A Briggs Company**
622 Mary Street; Suite 101; Warminster, PA 18974
Phone: 267-673-8117 - Fax: 267-673-8118
Sales@cabriggs.com - www.cabriggs.com



Description

The KOBOLD NKP is an economical level switch available in polypropylene or PVDF wetted materials allowing for wide compatibility with many aggressive liquids. It is distinguished by its repeatable response, compact size, and high capacity reed switch and is designed for installation into the sidewalls of tanks. The plastic float, containing a magnet, moves as the liquid level rises above or falls below the switchpoint. When the magnet moves close to the reed contact, the switch closes, completing the circuit. The switch function may be changed from normally open to normally closed by merely rotating it 180°. A simple and functional design makes the NKP virtually maintenance free.

Specifications

Materials

Float: Polypropylene or PVDF

Housing: Polypropylene or PVDF

Seal (Bulkhead Only)

PP: NBR

PVDF: FKM

Connection Fitting: 1/2" NPT or M16 Bulkhead

Orientation: Horizontal ± 30°

Max. Temperature

Polypropylene: 176 °F

PVDF: 212 °F

Max. Pressure: 145 PSIG

Min. Liquid Density

Polypropylene: 0.6 S.G

PVDF: 0.95 S.G.

Reed Switch

Max. Voltage: 230 VAC/VDC



Max. Current: 2 A

Max. Power: 40 VA

Cable: 3 ft, PVC-clad, AWG 20/2


Protection: NEMA 6 / IP68

Switch Function

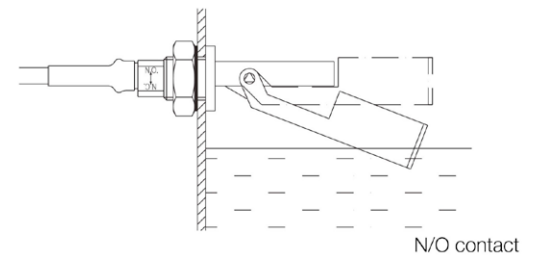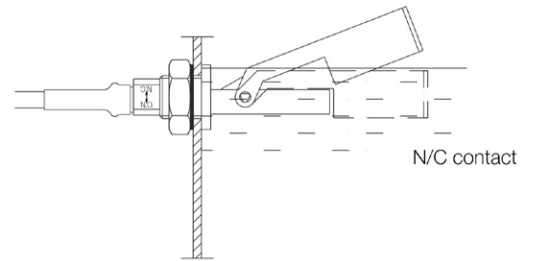


Dimensions

NPT Fitting

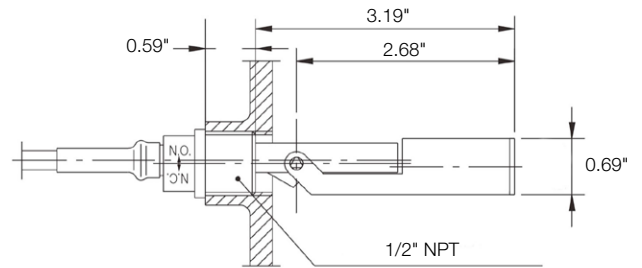

Bulkhead Fitting

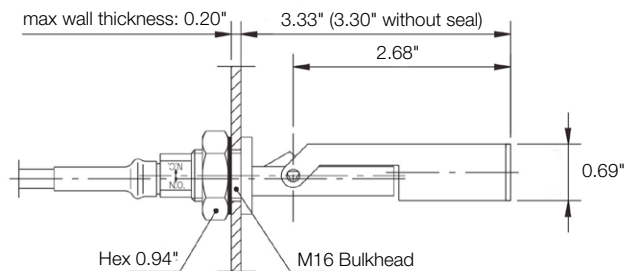

Order Details (Example: NKP-2501)

Fitting	Polypropylene	PVDF
1/2" NPT	NKP-2401	NKP-2501
M16 Bulkhead	NKP-6401	NKP-6501
Optional Cable Length (3 ft Standard)		
..EC10	10 ft (3 m) Cable	
..EC15	15 ft (5 m) Cable	
..EC21	21 ft (6.5 m) Cable	