

## Capacitance Level and Temperature Transducer



measuring  
•  
monitoring  
•  
analyzing

NRF-2 NRF-3



- Measures Both Level and Temperature
- Loop Powered 4-20 mA Operation
- Compact, High Quality Design
- Probe Lengths to 12 ft
- Temp. Range: 32...122 °F to -58...302 °F
- Fittings: 3/4" NPT and Others Available
- Level Accuracy:  $\pm 1\%$  of Span in Metal Tanks
- Temperature Accuracy:  $\pm 0.5\%$  of Span



KOBOLD companies worldwide:

Order from: **C A Briggs Company**  
622 Mary Street; Suite 101; Warminster, PA 18974  
Phone: 267-673-8117 - Fax: 267-673-8118  
[Sales@cabriggs.com](mailto:Sales@cabriggs.com) - [www.cabriggs.com](http://www.cabriggs.com)

KOBOLD Instruments, Inc.  
1801 Parkway View Drive  
Pittsburgh, PA 15205



**Description**

The KOBOLD series NRF-2 and NRF-3 combination level and temperature transmitters are truly a unique product. They are designed to measure level and temperature of conductive and non-conductive liquids in tanks. For level sensing, the probe measures the change in capacitance that occurs as level changes in the tank. For temperature sensing, the probe utilizes a platinum resistive element. The NRF-2 includes a loop powered transmitter for both level and temperature while the NRF-3 includes a loop powered transmitter for level and a 3-wire RTD output. A choice of rugged enclosure types with either standard NPT or optional Tri-Clamp® process connections are offered. The standard probe material is PFA clad 316 SS. Easy level calibration is accomplished via 4 push buttons with temperature calibration adjustment (if required) via two potentiometers located on the transmitter.



**Applications**

- Waste Treatment Plants
- Refineries
- Food and Beverage Industry
- Fire Protection Systems
- Water Storage Tanks
- Chemical Holding Tanks

**Technical Details**

**Level Specifications**

**Accuracy:** ± 1% of span  
(w/constant liquid dielectric)

**Repeatability:** ± 0.1 % of span

**Max. Length:** 12 feet

**Electrical Specifications**

**Input Power:** 12-30 VDC, polarity protected

**Output:** 4-20 mA, 2-wire

**Max. Loop Res:** 700 Ohm @ 24 VDC

**Calibration:** Via 4 push button switches

**Dampening Adjust:** 0...30 Seconds

**Temperature Range**

**Process:** -100...350 °F

**Ambient:** -58...140 °F

**Temperature Specifications**

**Input:** Pt-100, 3-wire,  $\alpha = 0.00385$ ,  
DIN EN 60751

**Output:** 4-20 mA loop powered,  
Linear to temperature

**Power Supply:** 12-30 VDC, polarity protected

**Long Term Drift:** ± 0.05 % FS / year

**Accuracy:** ± 0.5 % FS

**Span/Zero Adjustment:** 20 turn potentiometer,  
±10% for zero and span

**Max. Loop Resistance:** [  $V_{supply} - 9 \text{ VDC}$  ] / 20 mA

**Open Circuit Detection:** Over-scale limit ( 27.0 mA )  
or Under-scale limit ( 2.2 mA )

**Temperature Range**

**Process:** -100...350 °F

**Ambient:** -58...140 °F

**Mechanical Specifications**

**Enclosures:** Polyamide NEMA 4,  
Stainless NEMA 4X or  
Aluminum NEMA 4X

**Process Connection:** 3/4" NPT, Tri-Clamp®  
others available, consult factory

**Fitting Material:** 316 SS or PTFE

**Probe Material:** PFA clad 316 Stainless Steel

**Maximum Pressure**

**316 SS Fitting:** 500 PSIG @ 70 °F  
250 PSIG @ 300 °F  
100 PSIG @ 350 °F


**PTFE Fitting:** 14.7 PSIG max




NRF Ordering Information	
<b>NRF-2</b>	<b>Probe Construction</b> = 4-20mA Loop Powered Outputs for Level and Temperature
<b>NRF-3</b>	= 4-20mA Loop Powered for Level, RTD Pt100, 3-wire, a = 0.00385, DIN EN 60751 for Temperature
	<b>Temperature Measuring Range</b>
<b>00</b>	= Pt-100 3-wire RTD Output (used with NRF-3 only)
<b>05</b>	= 32...122 °F (0...50 °C)
<b>10</b>	= 32...212 °F (0...100 °C)
<b>20</b>	= 32...392 °F (0...200 °C)
<b>55</b>	= -58...122 °F (-50...50 °C)
<b>51</b>	= -58...302 °F (-50...150 °C)
	<b>Process Connection</b>
<b>1</b>	= 3/4" NPT, Stainless Steel
<b>2</b>	= 3/4" NPT, PTFE (Only Available with Polyamide Housing)
<b>3</b>	= 1-1/2" Tri-Clamp®
<b>4</b>	= 2" Tri-Clamp®
<b>8</b>	= 2-1/2" Tri-Clamp®
<b>9</b>	= 3" Tri-Clamp®
	<b>Enclosure</b>
<b>1</b>	= Polyamide
<b>2</b>	= Stainless Steel
<b>3</b>	= Aluminum (Not Available with Tri-Clamp® fitting)
<b>L</b>	= <b>Probe Length</b> , Specify in Inches (6" Minimum and 144" Maximum)
<b>NRF-2</b>	<b>51</b>
<b>1</b>	<b>3</b>
<b>L = 60"</b>	Sample NRF Part Number

**Dimensions**


**Polyamide Housing**

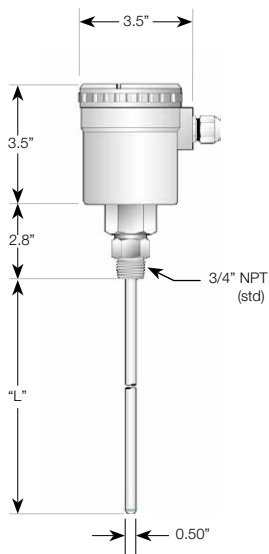

**Stainless Steel Housing**

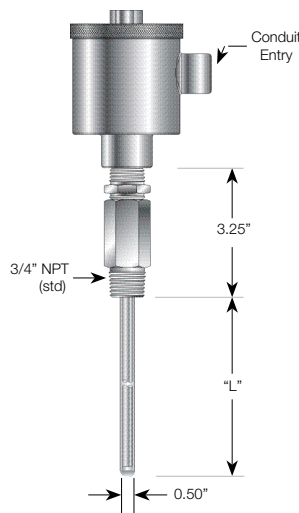

**Epoxy Coated Aluminum Housing**

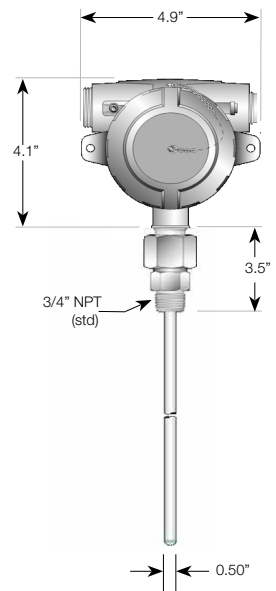

No responsibility taken for errors; subject to change without prior notice.