


Micro Bypass Level Indicator

with Switch Option



measuring
•
monitoring
•
analyzing

NZJ



- Installation Length: 4" ...22"
- p_{max} : 230 PSI
- t_{max} : 210 °F
- Viscosity: Max. 50 mm²/s
- Connection: 1/4" NPT, G1/4 (Male) Union Nut
- Material: Stainless Steel (304/316) / Aluminum
- Local Indication without Auxiliary Power
- Limit Contacts



Order from: **C A Briggs Company**

622 Mary Street; Suite 101; Warminster, PA 18974

Phone: 267-673-8117 - Fax: 267-673-8118

Sales@cabriggs.com - www.cabriggs.com

KOBOLD Instruments, Inc.
1801 Parkway View Drive
Pittsburgh, PA 15205

Description

The KOBOLD NZJ glass tube bypass level indicator indicates liquid level in small containers and tanks. It is engineered with durability in mind, as the glass tube is protected from damage by the stainless steel outer armature. The glass tube is sealed by two O-rings each, on both the top and bottom. Sealing materials are NBR, FKM, EPDM, or PTFE for compatibility with various media. The NZJ is available without a scale, or with an incremental inch, mm, or percentage scale attached to the glass measuring tube. It can also be fitted with one or two level switches. ATEX versions are also available. Installation length refers to the distance between the horizontal center lines of the two threaded stubs, with a minimum of 4 inches and a maximum of 22 inches.



Areas of Application

- Pharmaceutical
- Chemical
- Water Treatment
- Laboratories
- Small Storage Tanks for Liquids
- Gravity Tanks
- Capacity Tank

Technical Details

Installation Position: Vertical
Installation Length: 4"...22"
Scale Length (Visible Length): 2.4"...20.4"
Material: Stainless Steel (304/316)/Aluminum
Gasket: NBR, FKM, EPDM, or PTFE
Connection: 1/4" NPT, G1/4 (Male) Union Nut
Scale Material: Plastic Foil
Max. Pressure: 230 PSIG
Media and Ambient Temp: -13...212 °F (without switch)
 -13...158 °F (with switch)
Density: Any (No Float Used)
Max. Viscosity: 50 mm²/s

Models without ATEX

Type: Capacitive Sensor
Operating Voltage U_B: 10 ... 36 V_{DC}
Short Circuit Protection: Pulsing

Models without ATEX Continued

Voltage Drop at U_D: ≤ 2.5 V
Operating Current I_L: 0...100 mA
No Load Supply Current I₀: ≤ 12 mA
Switch Indication: LED, Yellow
Potentiometer: Sensitivity Adjustment
Ambient Temp: -13...158 °F
Connection Type: Cable PUR, 2 m
Core Cross Section: 0.34 mm²
Protection: IP65

Models with ATEX

Type: Capacitive Sensor
Ambient Temp: -13...158 °F
Operating Voltage: 10 ... 30 V_{DC}
DC Rated Current: ≤ 200 mA
Non-actuated Current Consumption: ≤ 15 mA
Residual Current: ≤ 0.1 mA
Output Function: 3-wire, N/O Contact, PNP
Voltage Drop at I_e: ≤ 1.8 V
Connection Type: Cable PUR, 2 m
Protection: IP67
ATEX Version: Ex II 3G Ex nA IIC T4 Gc
 Ex II 3D Ex tc IIIC T91°C Dc



Materials



Model	Tube	Body	Connection	Seals	Side Plates
NZJ-A	Borosilicate Glass	Aluminum	316 Stainless Steel	FKM	304 Stainless Steel
NZJ-K		304 Stainless Steel		EPDM	
NZJ-S		316 Stainless Steel		NBR PTFE	

Order Details (Example: NZJ-K 1 1 N2 00)

Model/Version	Measuring Scale	Seals	Connection	Switch
NZJ-A.. = Aluminum NZJ-K.. = 304 Stainless Steel NZJ-S.. = 316 Stainless Steel	..0.. = without ..1*.. = Plastic Foil on Measuring Tube (2 mm Division) ..2*.. = Plastic Foil on Measuring Tube (% Division) ..3*.. = Plastic Foil on Measuring Tube (1/8" Division)	..1.. = FKM ..3.. = EPDM ..4.. = NBR ..5.. = PTFE	..N2.. = 1/4" NPT ..G2.. = G 1/4 Male	..00 = without switch ..10 = 1x N/O ..20 = 2x N/O ..A0 = 1x ATEX ..B0 = 2x ATEX

* Installation length «L» to be specified in writing (scale length = L - 1.6").
 0% and 100% level are relative to the bottom and top connection.

Wiring Diagrams

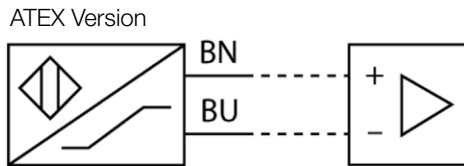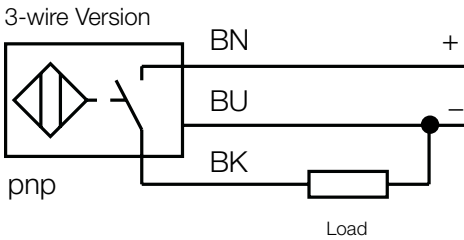

Dimensions

