

OBS-DGO SERIES

Double Sided Plastic Pressure Gauge


Order from:
C A Briggs Company
 622 Mary Street; Suite 101
 Warminster, PA 18974
 Phone: 267-673-8117 - 800-352-6265
 Fax: 267-673-8118
 Sales@cabriggs.com - www.cabriggs.com




- Double Sided
- No Filling Required
- Visual Pressure Range Markers
- Corrosion Resistant

PP

316 SS


RoHS
 Compliant



SERIES : OBS-DGO
CONNECTION : 316 SS - 1/4" NPT




FEATURES

- Heavy Duty Design
- Suitable for Corrosive Environments
- Dual Scales
- Heavy Duty Design
- 3 Range Tabs -Red-Yellow-Green
- Extra Large Colored Display
- High Accuracy .75 %
- Factory Pre-Filled
- Glycerin (Std) Silicone (Opt)
- Visual Pressure Ranges
- Simple to Install
- Perfect Mate for Plastic Isolators


SPECIFICATIONS

Dial Diameter	Large 2½" (Big Numbers-Clear Markers)
Mounting	Direct Mount, Bottom Connection
Housing	Polypropylene
Lens	High Impact Polycarbonate
Dial	Red & Black Scale White Background, dial arc 270°
Measuring Principle	Bourdon Tube-SS316-Brass
Movement	SS316 (Non Wetted)
Gauge	Red, Yellow, Green Movable Plastic Pressure Range Pointers Fitted on the Bezel
Connection	¼" (M) NPT 316 SST
Filling	Glycerin, Silicone (Opt)
Accuracy	±.75% F.S.
Operating temperature	Max. Working Temp. PP-170° F
Pressure Range	Standard range 0-60 / 0-100 / 0-160 PSI (Second Scale: kPA) Other units available, e.g., bar, MPa, etc. Pressures up to 1500 PSI available

HOW TO ORDER

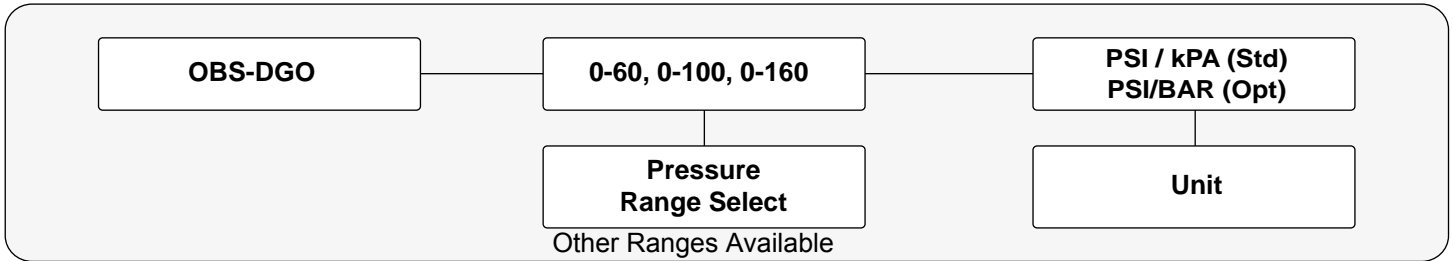

DIMENSIONS

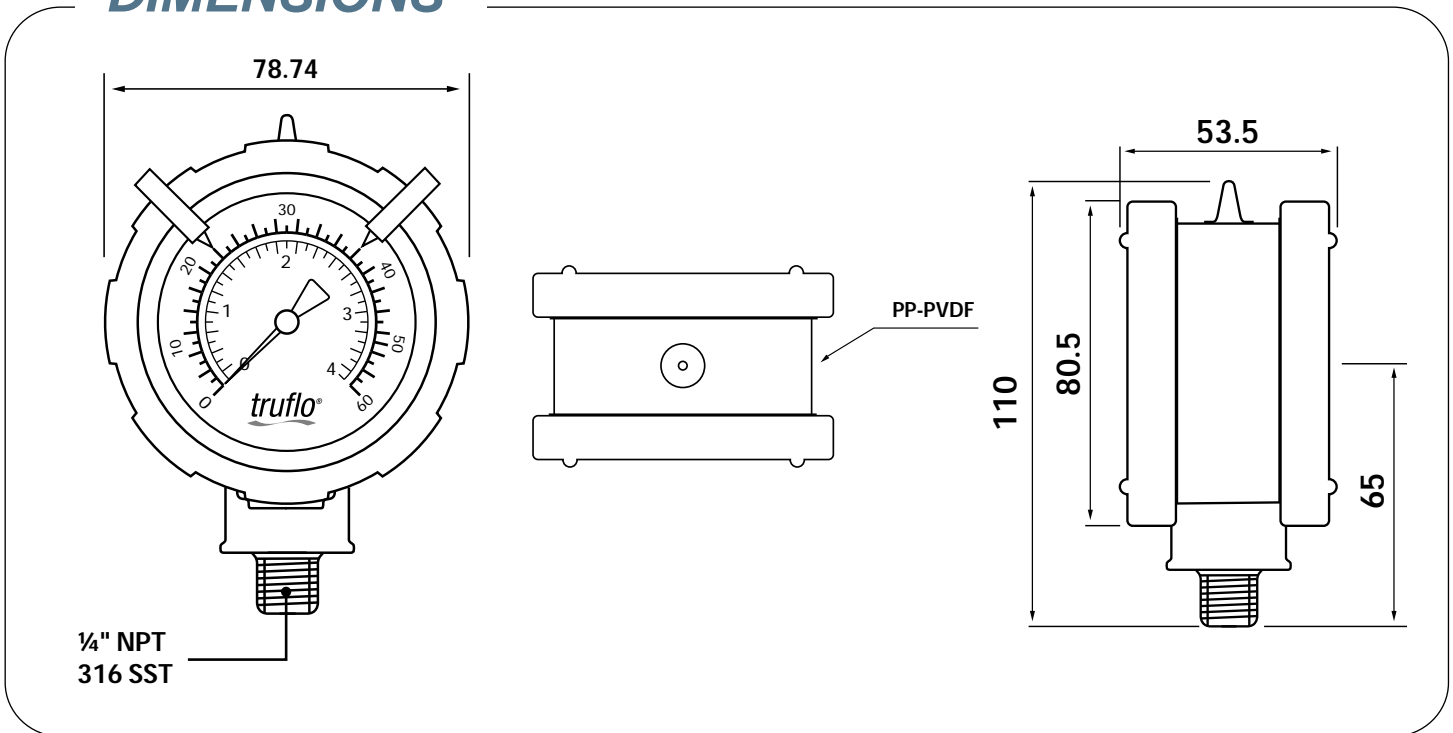

Installation

Do not tighten by grasping the case of the gauge as this may cause damage.

1. Before installing the OBS Series pressure gauge, ensure attention is given to the Process Liquid, Chemical Compatibility, Temperature, Vibration, Pressure Spikes, and other climatic and application conditions that may adversely affect the performance.
2. The user shall ensure that the correct gauge pressure range and the correct materials of construction are selected.

