

Heavy Duty Pressure Transmitter

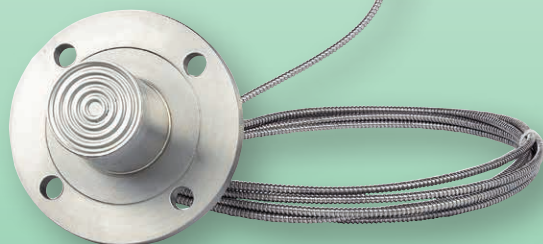


measuring
•
monitoring
•
analyzing

PAS



HART
COMMUNICATION FOUNDATION



ATEX



- Span: -14.5 ... 21.7 PSIG up to 0 ... 8700 PSIG
- t_{max} : 248 °F
- Process Connection: 1/2" NPT, or Various Diaphragm Seals on Request
- Material: 316L Stainless Steel
- Output: 4 ... 20 mA
- Sensor Input: Gauge or Absolute Pressure
- Self-Diagnostic Function: Sensor, Memory A/D Converter, Power etc.
- Digital Communication with HART® Protocol



Order from: **C A Briggs Company**

622 Mary Street; Suite 101; Warminster, PA 18974

Phone: 267-673-8117 - Fax: 267-673-8118

Sales@cabriggs.com - www.cabriggs.com

KOBOLD Instruments, Inc.
1801 Parkway View Drive
Pittsburgh, PA 15205



Heavy Duty Pressure Transmitter Model PAS



Description

The KOBOLD Pressure Transmitter model PAS is a microprocessor based high performance transmitter, which has a scalable pressure calibration and output signal. It automatically compensates for ambient temperature and process variables. Communication with the instrument and configuration of various parameters is possible via HART® protocol. All of the sensor's data is input, modified and stored via EEPROM.

Features

Superior Performance

- High Reference Accuracy:
±0.075 % of Calibrated Span
- Long-term Stability
- High Rangeability (100:1)

Flexibility

- Data configuration with HART® configurator
- Measurement of gauge or absolute pressure

Reliability

- Continuous self-diagnostic function
- Automatic ambient temperature compensation
- EEPROM write-protection
- Fail-mode process function

Transmitter Description

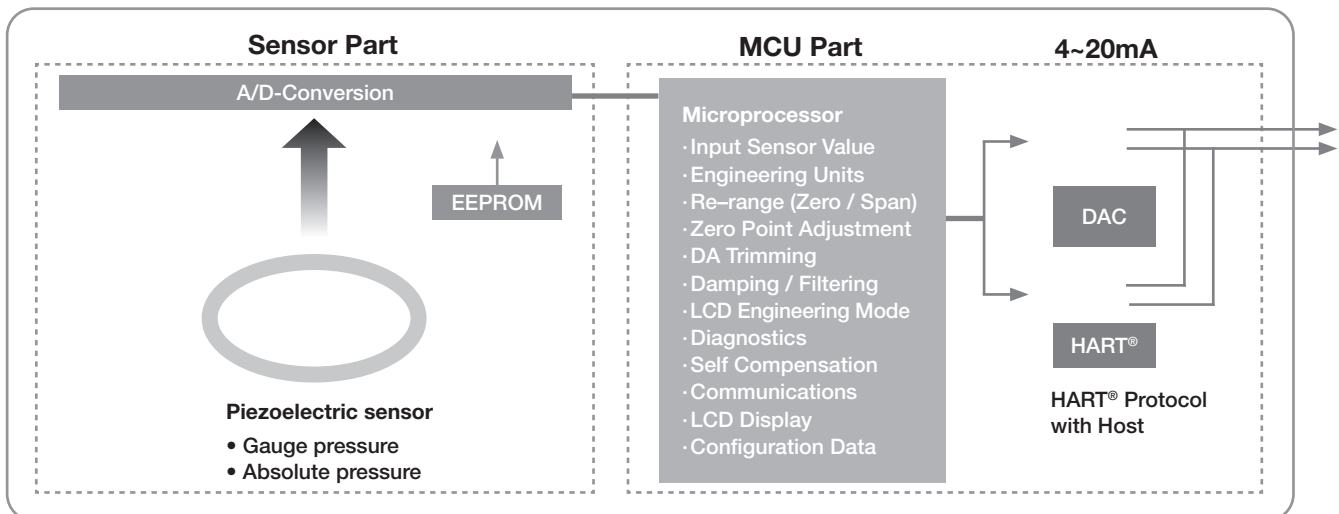
Electronics Module

The Electronics module consists of a circuit board sealed in an enclosure. There is an MCU module, an analog module, an LCD module, and a terminal module within the transmitter. The MCU module acquires the digital value from the analog module and applies correction coefficients selected from EEPROM. The output section of the MCU module converts the digital signal to a 4...20 mA output. The MCU module communicates with the HART®-based configurator or control system, such as DCS (Distributed Control System). The power section of the MCU module has a DC-to-DC power conversion circuit and an input/output isolation circuit. The LCD module plugs into the MCU module and displays the digital output in a user configured unit.

Sensor Inputs

The pressure transmitter model PAS is available as a piezo-resistive pressure transmitter which measures gauge pressure as well as absolute pressure. The sensor module converts the resistance into a digital value. The MCU module calculates the process pressure based on this digital value.

Functional Block Diagram



The sensor modules include the following features:

- The software of the transmitter compensates for thermal effects, improving performance.
- Precise Input Compensation during operation is achieved with temperature and pressure correction coefficients that are characterized over the range of the transmitter and stored in the sensor module's EEPROM memory.
- EEPROM stores sensor information and correction coefficients separately from the MCU module, allowing for easy repair, reconfiguration and replacement.

Basic Setups

The following settings can be easily configured from any host that can support HART® protocol:

- Operational parameters
- 4 ... 20 mA (zero points/span)
- Engineering units
- Damping time: 0.25...60 sec.
- Tag: 8 alphanumeric characters
- Descriptor: 16 characters
- Message: 32 characters
- Date: day/month/year

Calibration and Adjustment

- Lower/Upper range (zero/span)
- Sensor zero adjustment
- Zero point adjustment
- DAC output adjustment
- Transfer function
- Self-compensation

Self-Diagnostics and Others

- CPU & Analog Module Fault Detection
- Communication error
- Fail-mode handling
- LCD indication
- Temperature measurement of sensor module

Process Connection via Diaphragm Seals

For connecting the model PAS to different process connections, diverse diaphragm seal versions are necessary. They can be connected to the pressure transmitter directly or via a capillary tube. Depending on the application; different combinations of diaphragm seals, capillary tubes and fill fluids are possible. To clarify those possibilities, the special connections via diaphragm seals should be requested separately from the pressure transmitter.



Technical Details

| | |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Measuring Principle: | Piezoresistive Sensor |
| Measuring Span: | -14.5...21.7 PSIG up to 0...8700 (Depending on instrument version), zero and span values can be set anywhere within the range limits. Span must be greater than or equal to the minimum span. |
| Accuracy: | ±0.075% of span (0.1 URL ≤ span ≤ URL) ± [0.025+0.005x(URL/span)]% of span (0.01 URL ≤ span ≤ 0.1 URL) |
| Process Temperature: | -40...248 °F (Approval codes may effect limits. Max. ambient temperature at LCD = 176 °F.) |
| Ambient Temperature: | -22...176 °F |
| Ambient Temp. Effect: | ±(0.019% URL + 0.125% span)/28 °C |
| Storage Temperature: | -40...185 °F (Non-condensing) |
| Humidity Limit: | 5 %...98 % RH |
| Power Supply Effect: | ±0.005% of span/V |
| Stability: | ±[0.125% URL for 36 months] |



Technical Details Cont

Pressure Limits (with Silicone Oil)

(Valid for stand-alone unit only, without assembled diaphragm seals.)

Model G -14.5...43.5 PSIG (for Range 3)
-14.5...435 PSIG (for Range 4)
0...1552.5 PSIG (for Range 5)
0...5800 PSIG (for Range 6)
0...10875 PSIG (for Range 7)

Model A 0...72.5 PSIG (for Range 4)
0...435 PSIG (for Range 5)
0...754 PSIG (for Range 6)

Burst Pressure

Model G 87 PSIG (for Range 3)
580 PSIG (for Range 4)
2030 PSIG (for Range 5)
7250 PSIG (for Range 6)
11600 PSIG (for Range 7)

Model A 145 PSIG (for Range 4)
580 PSIG (for Range 5)
1015 PSIG (for Range 6)

Wetted Materials

Isolating Diaphragms: 316L Stainless Steel

Connection Thread: 316 Stainless Steel

Non-wetted Materials

Fill Fluid: Silicone oil

Electronics Housing: Aluminum, flameproof (Ex d) and waterproof (IP 67), 316 L SS (option)

Cover O-ring: NBR

Paint: Epoxy-polyester or polyurethane

Mounting Bracket: 2-inch pipe, 304 SS, painted carbon steel with 304 SS U-bolt

Nameplate: 304 Stainless steel

Process Connections: 1/2" NPT female

Mounting Position: Upright

Display: 5 Digit LCD

Power Supply: 12...45 VDC -operation
17.5...45 VDC -HART communications

Maximum Load: 250 Ohm at 17.5 VDC
550 Ohm at 24 VDC
Max. loop resistance = (U - 12 VDC) / 0.022 A

Electrical Connection: 1/2" NPT conduit with M4 screw terminals, G 1/2 conduit with M4 screw terminals

Output: Two wire 4...20 mA, user-configurable for linear output, digital process value superimposed on 4...20 mA signal, available to any host that conforms to the HART protocol

Update Time: 0.12 seconds

Turn-On Time: 3 seconds

Protection: IP67 for standard (code S)

Weight: 3.8 lbs (excluding options)
6.3 lbs (st. steel housing option)

Failure Mode: Fail high: current >= 21.1 mA
Fail low: current <= 3.78 mA

EMC Conformity Standards:

EMI (emission) - EN 50081-2:1993
EMS (immunity) - EN 50082-2:1995

ATEX Approval (Option):

Ex II 2G Exd IIC T6...T4
Ex II 1G or 2G Ex ia IIC T5 or T4 Ga or Gb

Technical Data for Version with 50 mm Extended Diaphragm

(Model PAS-P, Engineered for the Paper/Pulp Industry)

Application: Level and gauge pressure measurement

Accuracy: +/- 0.2% of calibrated span @ 68 °F

Long Term Stability: Application dependent, typically +/- 0.125% of URL / 1 year

Process Temperature: 68...95 °F

Ambient Temperature: 68...95 °F

Materials:

O-ring: FKM

Extended Sleeve: 304 Stainless Steel

Process Connection: 316-Ti / 316 Stainless Steel

Other Specifications: Same as Standard model



Order Details (Example: **PAS- G EE 3 S 4 N S0 0**):

| Model | Version | Material Diaphragm/Other | Measuring Range | Measuring Span |
|-------|---------------------------------------------------------|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| PAS- | ..G.. = Gauge Pressure ..A.. = Absolute Pressure | ..EE.. = 316L st. st./316 st. steel | for PAS-G | |
| | | | ..3.. = -14.5...21.7 PSIG ..4.. = -14.5...217 PSIG ..5.. = 0...725 PSIG ..6.. = 0...3625 PSIG ..7.. = 0...8700 PSIG | 6 W.C....21.7 PSIG 60 W.C....217 PSIG 200 W.C....725 PSIG 36.3 PSIG...3625 PSIG 87 PSIG...8700 PSIG |
| | | | for PAS-A | |
| | | | ..4.. = 0...36 PSIA ..5.. = 0...217 PSIA ..6.. = 0...362 PSIA | 10 W.C....36 PSIA 60 W.C....217 PSIA 100 W.C....362 PSIA |

Order Details Continued:

| Fill Liquid | Process Connection | Electrical Connection | Approvals | Options |
|------------------|-------------------------|---------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| ..S.. = silicone | ..4.. = 1/2" NPT female | ..N.. = 1/2" NPT epoxy-polyester painted aluminum ..G.. = G 1/2 epoxy-polyester painted aluminum | ..S0.. = standard (waterproof IP 67) ..F0.. = ATEX, flameproof, Ex d ..E0.. = ATEX, Intrinsically Safe, Ex i | ..0 = without ..E = oil free finish ..M = housing in stainless steel ..N ¹⁾ = mounting of PAS onto diaphragm seal |

¹⁾ Diaphragm seal model and application data to be clearly specified. If ordering the PAS with a DRM, the application guide posted on the product page online must be completed. For summary of diaphragm seal models and possible ranges, see page 9 onwards. For dimensional details see DRM data sheet.

Order Details Mounting Brackets:

| Description | Order Number |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| Angle type bracket for PAD/PAS vertical pipe mounting for PAS vertical pipe mounting for PAD incl. U-Clamp for 2" pipe mounting bracket and 2 x mounting nuts/ washers incl. 4 x mounting screws for PAS incl. 4 x mounting screws for PAD | ZUB-PAD/PAS-K |
| Flat type bracket for PAD/PAS horizontal pipe mounting for PAS vertical pipe mounting for PAD incl. U-Clamp for 2" pipe mounting bracket and mounting nuts/ washers incl. 4 x mounting bolts and washers for PAS incl. 4 x mounting bolts for PAD | ZUB-PAD/PAS-L |

Order Details Manifold Valve:

| Description | Order Number |
|----------------------------------------------|-----------------------|
| 2-way Manifold Valve, Direct Mount, Machined | V-2003CDADABAA |



Heavy Duty Pressure Transmitter Model PAS

Order Details for PAS-..P Extended Diaphragm Version for Paper/Pulp Industries (Example: PAS-P ES 3 S A N S 0 0)

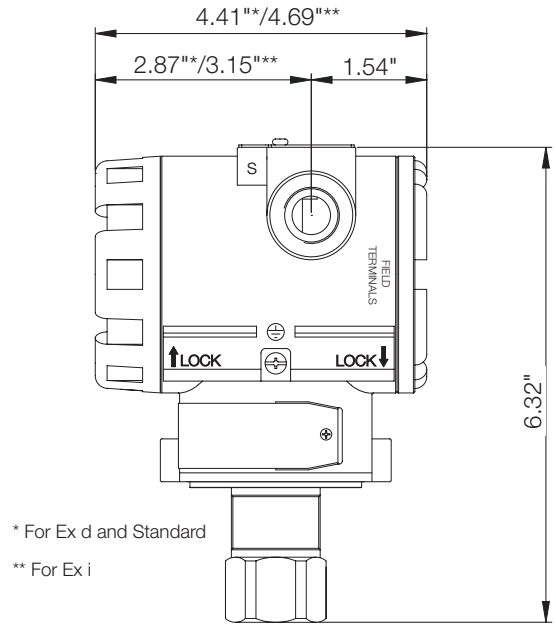
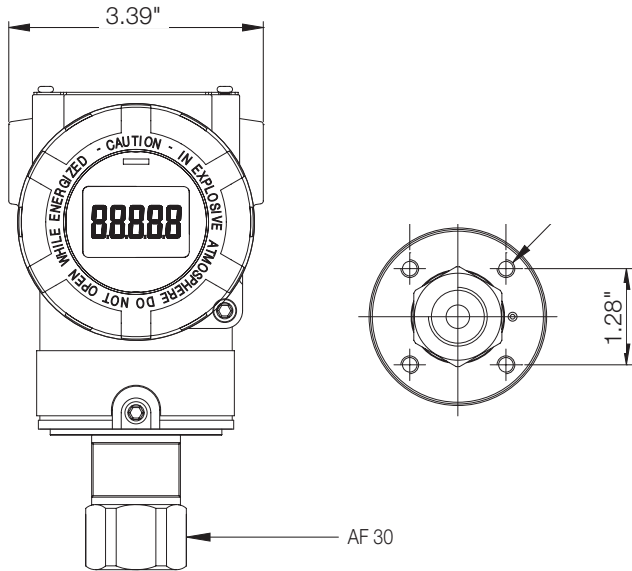
| Model | Material | Measuring Ranges | | |
|---------|-------------------------------------------------|------------------|----------------------------------------------------------|------------------------------------------------------|
| | Diaphragm/Other | Code | Measuring Range | Measuring Span |
| PAS-P.. | ..ES.. = 316 SS / 304 SS, 316L SS, 316-Ti SS | ..3.. | -10,000 mm H ₂ O...15,000 mm H ₂ O | 300 mm H ₂ O...15,000 mm H ₂ O |
| | | ..4.. | -10,000 mm H ₂ O...150 m H ₂ O | 1,500 mm H ₂ O...150 m H ₂ O |

Order Details Continued

| Filling Liquid | Process Connection | Electrical Connection | Approval | Manifold Valve | Options |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|-----------------|---------------|
| ..S.. = Silicone | ..N.. = 1" Class 150 RF ..P.. = 1-1/4" Class 150 RF ..Q.. = 1-1/2" Class 150 RF ..R.. = 2" Class 150 RF ..S.. = 2-1/2" Class 150 RF ..T.. = 3" Class 150 RF ..U.. = 4" Class 150 RF ..V.. = 5" Class 150 RF ..W.. = 6" Class 150 RF | ..N.. = 1/2" NPT epoxy-polyester painted aluminum ..G.. = 1/2" epoxy-polyester painted aluminum | ..S.. = without, standard, (waterproof IP 67) | ..0.. = without | ..0 = without |

Dimensions

Standard Model

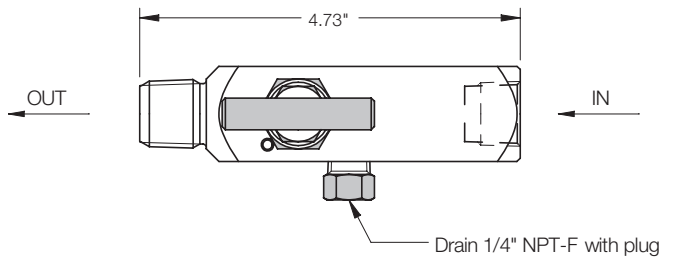
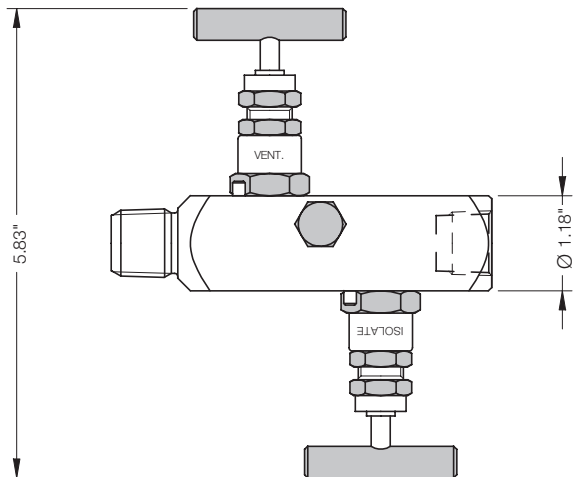

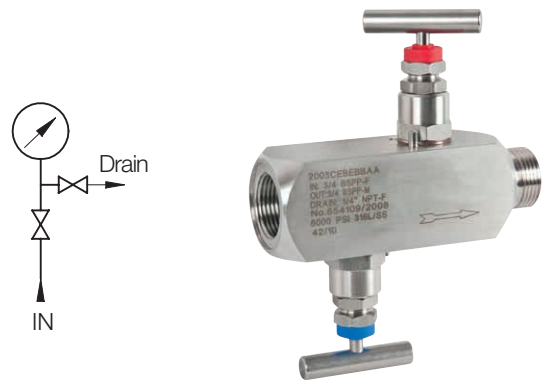


2-way Manifold Valve: (Direct Mount, Machined) V-2003CDADABAA (PTFE Packing)


(Inlet: 1/2" NPT Female/Outlet: 1/2" NPT Male)

Technical Details

- Material:** AISI 316L
- Pressure Rating:** 6000 psi
- Temperature Range:** -99...410 °F (PTFE Packing), Standard
-65...950 °F (GRAPHOIL Packing), On Request
- Weight:** 1.94 lbs



Included Accessories: Plug



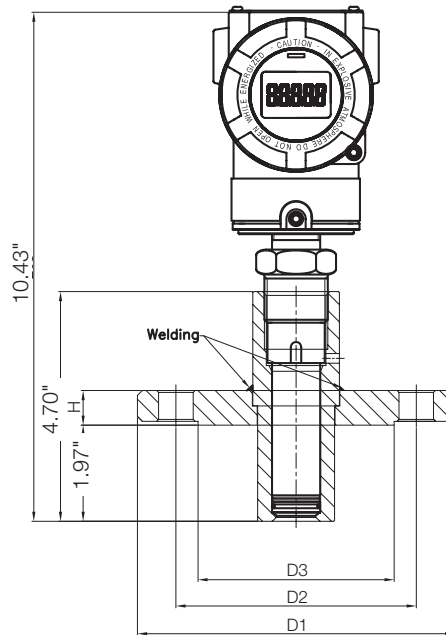
No responsibility taken for errors;
subject to change without prior notice.



Heavy Duty Pressure Transmitter Model PAS

Dimensions

Model: PAS-P with Extended Diaphragm 50 mm



Connection ASME B16.5 RF Class 150

| Code | inches | D1 | D2 | D3 | H |
|------|--------|--------|-------|-------|-------|
| N | 1 | 4.25" | 3.12" | 2.00" | 0.56" |
| P | 1-¼ | 4.62" | 3.50" | 2.50" | 0.62" |
| Q | 1-½ | 5.00" | 3.88" | 2.88" | 0.69" |
| R | 2 | 6.00" | 4.75" | 3.62" | 0.75" |
| S | 2-½ | 7.00" | 5.50" | 4.12" | 0.88" |
| T | 3 | 7.50" | 6.00" | 5.00" | 0.94" |
| U | 4 | 9.00" | 7.50" | 6.19" | 0.94" |
| V | 5 | 10.00" | 8.50" | 7.31" | 0.94" |
| W | 6 | 11.00" | 9.50" | 8.50" | 1.00" |

Example of PAS Directly Assembled with Diaphragm Seal
(for Dimensional Details, see DRM Datasheet)

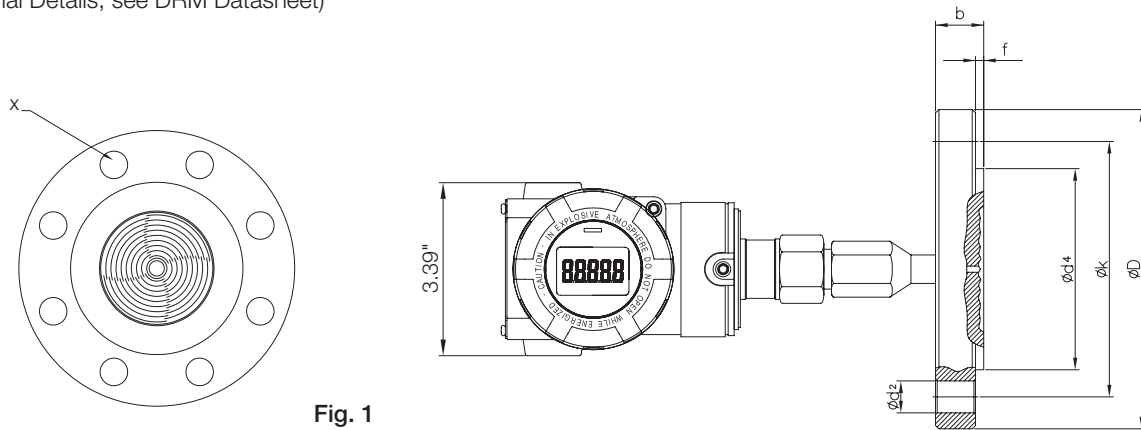


Fig. 1

Example of PAS Remotely Assembled with Diaphragm Seal and Capillary
(for Dimensional Details, see DRM Datasheet)

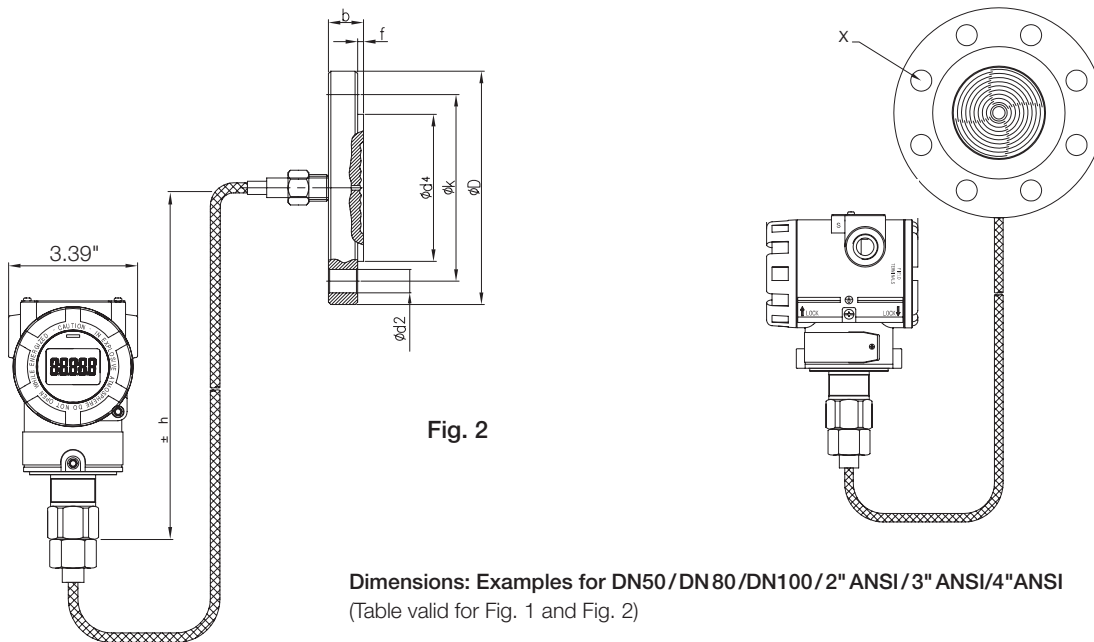


Fig. 2

Dimensions: Examples for DN50/DN80/DN100/2" ANSI/3" ANSI/4" ANSI
(Table valid for Fig. 1 and Fig. 2)

| Flange Type | D | k | d ² | b | f | d ⁴ | X |
|-----------------|--------|-------|----------------|-------|-------|----------------|-------|
| DN50 PN16 | 6.50" | 4.92" | 0.71" | 0.71" | 0.08" | 4.02" | 0.16" |
| DN50 PN40 | 6.50" | 4.92" | 0.71" | 0.79" | 0.08" | | 0.16" |
| 2" ANSI Cl. 150 | 6.00" | 4.75" | 0.75" | 0.75" | 0.08" | 3.62" | 0.16" |
| 2" ANSI Cl. 300 | 6.50" | 5.00" | 0.75" | 0.88" | 0.08" | | 0.31" |
| DN80 PN16 | 7.87" | 6.30" | 0.71" | 0.79" | 0.08" | 5.43" | 0.31" |
| DN80 PN40 | 7.87" | 6.30" | 0.71" | 0.94" | 0.08" | | 0.31" |
| 3" ANSI Cl. 150 | 7.50" | 6.00" | 0.75" | 0.94" | 0.06" | 5.00" | 0.16" |
| 3" ANSI Cl. 300 | 8.25" | 6.63" | 0.87" | 1.12" | 0.06" | | 0.31" |
| DN100 PN16 | 8.66" | 7.09" | 0.71" | 0.79" | 0.08" | 5.87" | 0.31" |
| DN100 PN40 | 9.25" | 7.48" | 0.87" | 0.94" | 0.08" | | 0.31" |
| 4" ANSI Cl. 150 | 9.00" | 7.50" | 0.75" | 0.94" | 0.06" | 6.19" | 0.31" |
| 4" ANSI Cl. 300 | 10.00" | 7.87" | 0.87" | 1.26" | 0.06" | | 0.31" |



Example of PAS Remotely Assembled with Extended Diaphragm Seal and Capillary
(for Dimensional Details, see DRM Datasheet)

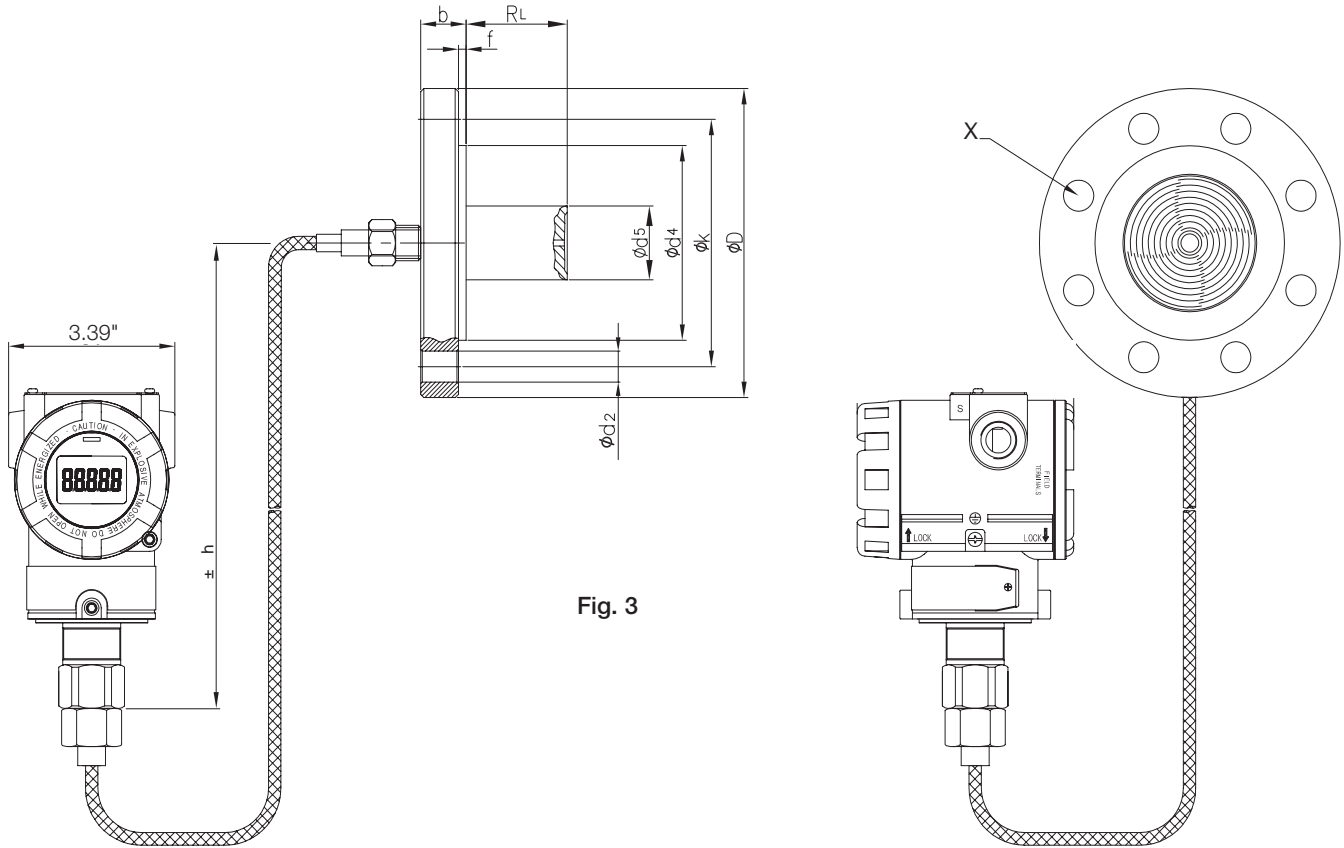


Fig. 3

Dimensions: Examples for DN50/DN80/DN100/2" ANSI/3" ANSI/4" ANSI

| Flange Type | D | k | d ² | b | f | d ⁴ | X | d ⁵ | R _L |
|-----------------|--------|-------|----------------|-------|-------|----------------|-------|----------------|----------------------------------------------------------------------------------------|
| DN50 PN16 | 6.50" | 4.92" | 0.71" | 0.71" | 0.08" | 4.02" | 0.16" | 1.89" | 50 mm (2")/ 100 mm (4")/ 150 mm (6")/ 200 mm (8")/ (customer specified) |
| DN50 PN40 | 6.50" | 4.92" | 0.71" | 0.79" | 0.08" | 4.02" | 0.16" | 1.89" | |
| 2" ANSI Cl. 150 | 6.00" | 4.75" | 0.75" | 0.75" | 0.08" | 3.62" | 0.16" | 1.89" | |
| 2" ANSI Cl. 300 | 6.50" | 5.00" | 0.75" | 0.88" | 0.08" | 3.62" | 0.31" | 1.89" | |
| DN80 PN16 | 7.87" | 6.30" | 0.71" | 0.79" | 0.08" | 5.43" | 0.31" | 2.99" | |
| DN80 PN40 | 7.87" | 6.30" | 0.71" | 0.94" | 0.08" | 5.43" | 0.31" | 2.99" | |
| 3" ANSI Cl. 150 | 7.50" | 6.00" | 0.75" | 0.94" | 0.06" | 5.00" | 0.16" | 2.99" | |
| 3" ANSI Cl. 300 | 8.25" | 6.63" | 0.87" | 1.12" | 0.06" | 5.00" | 0.31" | 2.99" | |
| DN100 PN16 | 8.66" | 7.09" | 0.71" | 0.79" | 0.08" | 5.87" | 0.31" | 3.50" | |
| DN100 PN40 | 9.25" | 7.48" | 0.87" | 0.94" | 0.08" | 5.87" | 0.31" | 3.50" | |
| 4" ANSI Cl. 150 | 9.00" | 7.50" | 0.75" | 0.94" | 0.06" | 6.19" | 0.31" | 3.50" | |
| 4" ANSI Cl. 300 | 10.00" | 7.87" | 0.87" | 1.26" | 0.06" | 6.19" | 0.31" | 3.50" | |





Diaphragm Seal Models (Direct or Remote Assembly)

(Standard device without additional options (e.g. coatings, special materials etc.).

For dimensions/technical data, see DRM data sheet. Accuracy: 0.075% of calibrated span + influence of seal).

Over and under ranges of the min./max. span may be possible, but must be verified by KOBOLD for each application.

The indicated min./max. spans do not consider any coating of the diaphragm seals. For additional information contact KOBOLD.









| Model DRM | Size Code | Size | Note | Ø Diaphragm | Max. Media Temperature | Min. Span (PSIG) | Max. Span (PSIG) |
|--------------------------------------------------------------------------------------------------------------------|------------|-----------|-----------------------------------|-------------|------------------------|------------------|------------------|
| DRM-189  | F23 | Ø 18 | For homogenizing machines, direct | Ø 18 | 248 °F | 0...58 | 14500 |
| | | | | | | | |
| DRM-600  | R15 | G ½ | Fixed male thread, direct | Ø 18 | 212 °F | 0...58* | 14500 |
| | R20 | G ¾ | | Ø 23.8 | | 0...23.2* | 14500 |
| | R25 | G 1 | | Ø 29.5 | | 0...14.5 | 8700 |
| | R32 | G 1 ¼ | | Ø 38 | | 0...8.7 | 8700 |
| | R40 | G 1 ½ | | Ø 40 | | 0...8.7 | 8700 |
| | N15 | ½" NPT | | Ø 18 | | 0...58* | 14500 |
| | N20 | ¾" NPT | | Ø 18 | | 0...58* | 14500 |
| | N25 | 1" NPT | | Ø 23.8 | | 0...23.2 | 8700 |
| | N32 | 1 ¼" NPT | | Ø 34.5 | | 0...14.5 | 8700 |
| | M20 | M20 x 1.5 | | Ø 18 | | 0...58 | 8700 |
| | M48 | M 48 x 3 | | Ø 40 | | 0...8.7 | 8700 |
| DRM-601  | R15 | G ½ | Fixed male thread with capillary | Ø 18 | 392 °F | 0...58* | 14500 |
| | R20 | G ¾ | | Ø 23.8 | | 0...23.2* | 14500 |
| | R25 | G 1 | | Ø 29.5 | | 0...14.5 | 8700 |
| | R32 | G 1 ¼ | | Ø 38 | | 0...8.7 | 8700 |
| | R40 | G 1 ½ | | Ø 40 | | 0...8.7 | 8700 |
| | N15 | ½" NPT | | Ø 18 | | 0...58* | 14500 |
| | N20 | ¾" NPT | | Ø 18 | | 0...58* | 14500 |
| | N25 | 1" NPT | | Ø 23.8 | | 0...23.2 | 8700 |
| | N32 | 1 ¼" NPT | | Ø 34.5 | | 0...14.5 | 8700 |
| | M20 | M20 x 1,5 | | Ø 18 | | 0...58 | 8700 |
| | M48 | M 48 x 3 | | Ø 40 | | 0...8.7 | 8700 |
| DRM-602 DIN 11851  | R20 | DN 20 | Dairy connection, direct | Ø 18 | 212 °F | 0...58 | 580 |
| | R25 | DN 25 | | Ø 23.8 | | 0...23.2 | 580 |
| | R32 | DN 32 | | Ø 29.5 | | 0...14.5 | 580 |
| | R40 | DN 40 | | Ø 38 | | 0...8.7 | 580 |
| | R50 | DN 50 | | Ø 45.5 | | 0...5.8 | 362.5 |
| | R65 | DN 65 | | Ø 64 | | 0...3.6 | 362.5 |
| | R80 | DN 80 | | Ø 64 | | 0...3.6 | 362.5 |
| | R1H | DN 100 | | Ø 64 | | 0...3.6 | 362.5 |

* Consult Factory for Minimum Span per Customer Application



Heavy Duty Pressure Transmitter Model PAS








Diaphragm Seal Models (Direct or Remote Assembly)

| Model DRM | Size Code | Size | Note | Ø Diaphragm | Max. Media Temperature | Min. Span (PSIG) | Max. Span (PSIG) |
|------------------------------------------------------------------------------------------------------------------|-----------|-----------|---------------------------------------------|---------------|------------------------|------------------|------------------|
| DRM-603 DIN 11851  | R20 | DN 20 | Dairy connection, capillary | Ø 18 | 392 °F | 0...58 | 580 |
| | R25 | DN 25 | | Ø 23.8 | | 0...23.2 | 580 |
| | R32 | DN 32 | | Ø 29.5 | | 0...14.5 | 580 |
| | R40 | DN 40 | | Ø 38 | | 0...8.7 | 580 |
| | R50 | DN 50 | | Ø 45.5 | | 0...5.8 | 362.5 |
| | R65 | DN 65 | | Ø 64 | | 0...3.6 | 362.5 |
| | R80 | DN 80 | | Ø 64 | | 0...3.6 | 362.5 |
| R1H | DN 100 | Ø 64 | 0...3.6 | 362.5 | | | |
| DRM-604 IDF  | R25 | 1" | IDF socket with union nut, direct | Ø 29.5 | 212 °F | 0...23.2 | 580 |
| | R40 | 1½" | | Ø 42 | | 0...14.5 | 580 |
| | R50 | 2" | | Ø 56 | | 0...8.7 | 580 |
| DRM-605 IDF  | R25 | 1" | IDF socket with union nut, capillary | Ø 29.5 | 392 °F | 0...14.5 | 580 |
| | R40 | 1½" | | Ø 42 | | 0...8.7 | 580 |
| | R50 | 2" | | Ø 56 | | 0...5.8 | 580 |
| DRM-606  | R20 | G¾ | Capsule seal with rotatable male, capillary | short capsule | 662 °F | 0...87 | 8700 |
| | R28 | M28 x 1.5 | | | | 0...87 | 8700 |
| DRM-607  | R15 | G½ | Capsule seal with fixed male, direct | long capsule | 212 °F | 0...14.5 | 8700 |
| | R20 | G¾ | | | | 0...14.5 | 8700 |
| DRM-607/1  | R15 | G¾ | Capsule seal with fixed male, direct | long capsule | 212 °F | 0...14.5 | 8700 |
| | R20 | G1 | | | | 0...14.5 | 8700 |
| DRM-608/1  | R20 | G¾ | Capsule seal with union nut, capillary | long capsule | 662 °F | 0...14.5 | 8700 |
| | R25 | G1 | Capsule seal with union nut, capillary | long capsule | | 0...14.5 | 8700 |
| DRM-610 SMS  | R40 | 1½" | SMS socket with union nut, direct | Ø 34.5 | 212 °F | 0...14.5 | 580 |
| | R50 | 2" | | Ø 45.5 | | 0...5.8 | 580 |

No responsibility taken for errors;
subject to change without prior notice.



Diaphragm Seal Models (Direct or Remote Assembly)









| Model DRM | Size Code | Size | Note | Ø Diaphragm | Max. Media Temperature | Min. Span (PSIG) | Max. Span (PSIG) |
|------------------------------------------------------------------------------------------------------------------|-----------|---------|--------------------------------------|-------------|------------------------|------------------|------------------|
| DRM-611 SMS  | R40 | 1 1/2" | SMS socket with union nut, capillary | Ø 34.5 | 392 °F | 0...14.5 | 580 |
| | R50 | 2" | | Ø 45.5 | | 0...5.8 | 580 |
| DRM-612 Clamp  | R25 | 1" | Tri-Clamp, direct | Ø 18 | 212 °F | 0...58 | 232 |
| | F40 | 1 1/2" | | Ø 35.5 | | 0...14.5 | 232 |
| | F50 | 2" | | Ø 45.5 | | 0...5.8 | 232 |
| | R65 | 2 1/2" | | Ø 52 | | 0...5.8 | 232 |
| | R80 | 3" | | Ø 64 | | 0...3.6 | 145 |
| DRM-613 Clamp  | R25 | 1" | Tri-Clamp, capillary | Ø 18 | 392 °F | 0...58 | 232 |
| | F40 | 1 1/2" | | Ø 35.5 | | 0...14.5 | 232 |
| | F50 | 2" | | Ø 45.5 | | 0...5.8 | 232 |
| | R65 | 2 1/2" | | Ø 52 | | 0...5.8 | 232 |
| | R80 | 3" | | Ø 64 | | 0...3.6 | 145 |
| DRM-614 APV-RJT  | R20 | 1" | Union-nut, direct | Ø 29.5 | 212 °F | 0...23.2 | 1450 |
| | R40 | 1 1/2" | | Ø 42.5 | | 0...8.7 | 1450 |
| | R50 | 2" | | Ø 56 | | 0...5.8 | 1450 |
| DRM-615 APV-RJT  | R20 | 1" | Union-nut, capillary | Ø 29.5 | 392 °F | 0...23.2 | 1450 |
| | R40 | 1 1/2" | | Ø 42.5 | | 0...8.7 | 1450 |
| | R50 | 2" | | Ø 56 | | 0...5.8 | 1450 |
| DRM-616  | R45 | M45 x 2 | Union-nut, direct | Ø 23.8 | 212 °F | 0...23.2 | 23200 |
| DRM-617  | R45 | M45 x 2 | Union-nut, capillary | Ø 23.8 | 248 °F | 0...23.2 | 23200 |

No responsibility taken for errors; subject to change without prior notice.












Heavy Duty Pressure Transmitter Model PAS

Diaphragm Seal Models (Direct or Remote Assembly)

| Model DRM | Size Code | Size | Note | Ø Diaphragm | Max. Media Temperature | Min. Span (PSIG) | Max. Span (PSIG) |
|--------------------------------------------------------------------------------------------------|-----------|--------------------|-----------------------|----------------------|------------------------|------------------|------------------|
|  DRM-620 | R20 | G $\frac{3}{4}$ | Union-nut, capillary | Ø 23.8 | 662 °F | 0...23.2 | 8700 |
| | DRM-620/1 | R20 | G $\frac{3}{4}$ | Union-nut, capillary | Ø 23.8 | 662 °F | 0...23.2 |
|  DRM-621 | F38 | Ø 38 mm | Flange, direct | Ø 38 | 482 °F | 0...5.8 | 580 |
|  DRM-622 | F48 | Ø 48 mm | Flange, direct | Ø 48 | 212 °F | 0...5.8 | 580 |
| | F48 1 | Ø 48 mm | | Ø 48 | | 0...5.8 | 580 |
| | F48 2 | Ø 48 mm | | Ø 48 | | 0...5.8 | 580 |
|  DRM-622/1 | F48 | Ø 48 mm | Flange, capillary | Ø 48 | 392 °F | 0...5.8 | 580 |
| | F48 1 | Ø 48 mm | | Ø 48 | | 0...5.8 | 580 |
| | F48 2 | Ø 48 mm | | Ø 48 | | 0...5.8 | 580 |
|  DRM-624 | F1H | Ø 100 mm | Flange, direct | Ø 63.5 | 212 °F | 0...3.6 | 580 |
| | F1H T | Ø 100 mm | Flange, direct | | | 0...3.6 | 580 |
|  DRM-624/1 | F1H | Ø 100 mm | Flange, capillary | | 482 °F | 0...3.6 | 580 |
|  DRM-625 | R15 | G $\frac{1}{2}$ | Fixed male, direct | Ø 63.5 | 212 °F | 0...3.6 | 580 |
| | N15 | $\frac{1}{2}$ NPT | | | | 0...3.6 | 580 |
| | I15 | G $\frac{1}{2}$ IG | | | | 0...3.6 | 580 |
|  DRM-625/1 | R15 | G $\frac{1}{2}$ | Fixed male, capillary | Ø 63.5 | 482 °F | 0...3.6 | 580 |
| | N15 | $\frac{1}{2}$ NPT | | | | 0...3.6 | 580 |
| | I15 | G $\frac{1}{2}$ IG | | | | 0...3.6 | 580 |

No responsibility taken for errors;
subject to change without prior notice.

Diaphragm Seal Models (Direct or Remote Assembly)










| Model DRM | Size Code | Size | Note | Ø Diaphragm | Max. Media Temperature | Min. Span (PSIG) | Max. Span (PSIG) |
|----------------------------------------------------------------------------------------------------------------|-----------|------------|----------------------------|-------------|------------------------|------------------|------------------|
| DRM-626 PN25  | R08 A025 | G ¼ male | Fixed male, direct | Ø 56 | 176 °F | 0...5.8 | 362.5 |
| | R08 I025 | G ¼ female | Fixed female, direct | Ø 56 | | 0...5.8 | 362.5 |
| | R15 A025 | G ½ male | Fixed male, direct | Ø 56 | | 0...5.8 | 362.5 |
| | R15 I025 | G ½ female | Fixed female, direct | Ø 56 | | 0...5.8 | 362.5 |
| | N15 A025 | ½ NPT male | Fixed male, direct | Ø 56 | | 0...5.8 | 362.5 |
| DRM-626 PN100  | R08 A100 | G ¼ male | Fixed male, direct | Ø 56 | 176 °F | 0...5.8 | 1450 |
| | R08 I100 | G ¼ female | Fixed female, direct | Ø 56 | | 0...5.8 | 1450 |
| | R15 A100 | G ½ male | Fixed male, direct | Ø 56 | | 0...5.8 | 1450 |
| | R15 I100 | G ½ female | Fixed female, direct | Ø 56 | | 0...5.8 | 1450 |
| | N15 A100 | ½ NPT male | Fixed male, direct | Ø 56 | | 0...5.8 | 1450 |
| DRM-626 PN250  | R08 A250 | G ¼ male | Fixed male, direct | Ø 56 | 176 °F | 0...5.8 | 3625 |
| | R08 I250 | G ¼ female | Fixed female, direct | Ø 56 | | 0...5.8 | 3625 |
| | R15 A250 | G ½ male | Fixed male, direct | Ø 56 | | 0...5.8 | 3625 |
| | R15 I250 | G ½ female | Fixed female, direct | Ø 56 | | 0...5.8 | 3625 |
| | N15 A250 | ½ NPT male | Fixed male, direct | Ø 56 | | 0...5.8 | 3625 |
| DRM-627 PN25  | R08 A025 | G ¼ male | Fixed male, capillary | Ø 56 | 482 °F | 0...5.8 | 362.5 |
| | R08 I025 | G ¼ female | Fixed female, capillary | Ø 56 | | 0...5.8 | 362.5 |
| | R15 A025 | G ½ male | Fixed male, capillary | Ø 56 | | 0...5.8 | 362.5 |
| | R15 I025 | G ½ female | Fixed female, capillary | Ø 56 | | 0...5.8 | 362.5 |
| | N15 A025 | ½ NPT male | Fixed male, capillary | Ø 56 | | 0...5.8 | 362.5 |
| DRM-627 PN100  | R08 A100 | G ¼ male | Fixed male, capillary | Ø 56 | 482 °F | 0...5.8 | 1450 |
| | R08 I100 | G ¼ female | Fixed female, capillary | Ø 56 | | 0...5.8 | 1450 |
| | R15 A100 | G ½ male | Fixed male, capillary | Ø 56 | | 0...5.8 | 1450 |
| | R15 I100 | G ½ female | Fixed female, capillary | Ø 56 | | 0...5.8 | 1450 |
| | N15 A100 | ½ NPT male | Fixed male, capillary | Ø 56 | | 0...5.8 | 1450 |
| DRM-627 PN250  | R08 A250 | G ¼ male | Fixed male, capillary | Ø 56 | 482 °F | 0...5.8 | 3625 |
| | R08 I250 | G ¼ female | Fixed female, capillary | Ø 56 | | 0...5.8 | 3625 |
| | R15 A250 | G ½ male | Fixed male, capillary | Ø 56 | | 0...5.8 | 3625 |
| | R15 I250 | G ½ female | Fixed female, capillary | Ø 56 | | 0...5.8 | 3625 |
| | N15 A250 | ½ NPT male | Fixed male, capillary | Ø 56 | | 0...5.8 | 3625 |
| DRM-628 PN06  | F25P06 | DN25 | Flange to EN1092-1, direct | Ø 24 | 176 °F | 0...23.2 | 87 |
| | F32P06 | DN32 | | Ø 30 | | 0...23.2 | 87 |
| | F40P06 | DN40 | | Ø 38 | | 0...8.7 | 87 |
| | F50P06 | DN50 | | Ø 48 | | 0...5.8 | 87 |
| | F65P06 | DN65 | | Ø 64 | | 0...3.6 | 87 |
| | F80P06 | DN80 | | Ø 64 | | 0...3.6 | 87 |
| | N1HP06 | DN100 | | Ø 64 | | 0...3.6 | 87 |
| DRM-628 PN16  | F25P16 | DN25 | Flange to EN1092-1, direct | Ø 24 | 176 °F | 0...23.2 | 232 |
| | F32P16 | DN32 | | Ø 30 | | 0...23.2 | 232 |
| | F40P16 | DN40 | | Ø 38 | | 0...8.7 | 232 |
| | F50P16 | DN50 | | Ø 48 | | 0...5.8 | 232 |
| | F65P16 | DN65 | | Ø 64 | | 0...3.6 | 232 |
| | F80P16 | DN80 | | Ø 64 | | 0...3.6 | 232 |
| | N1HP16 | DN100 | | Ø 64 | | 0...3.6 | 232 |
| DRM-628 PN40  | F25P40 | DN25 | Flange to EN1092-1, direct | Ø 24 | 176 °F | 0...23.2 | 580 |
| | F32P40 | DN32 | | Ø 30 | | 0...23.2 | 580 |
| | F40P40 | DN40 | | Ø 38 | | 0...8.7 | 580 |
| | F50P40 | DN50 | | Ø 48 | | 0...5.8 | 580 |
| | F65P40 | DN65 | | Ø 64 | | 0...3.6 | 580 |
| | F80P40 | DN80 | | Ø 64 | | 0...3.6 | 580 |
| | N1HP40 | DN100 | | Ø 64 | | 0...3.6 | 580 |

No responsibility taken for errors; subject to change without prior notice.



Heavy Duty Pressure Transmitter Model PAS








Diaphragm Seal Models (Direct or Remote Assembly)

| Model DRM | Size Code | Size | Note | Ø Diaphragm | Max. Media Temperature | Min. Span (PSIG) | Max. Span (PSIG) |
|-----------------------------------------------------------------------------------------------------------------|-----------|--------------|-------------------------------|-------------|------------------------|------------------|------------------|
| DRM-629 PN 06  | F25P06 | DN25 | Flange to EN1092-1, capillary | Ø 24 | 482 °F | 0...23.2 | 87 |
| | F32P06 | DN32 | | Ø 30 | | 0...23.2 | 87 |
| | F40P06 | DN40 | | Ø 38 | | 0...8.7 | 87 |
| | F50P06 | DN50 | | Ø 48 | | 0...5.8 | 87 |
| | F65P06 | DN65 | | Ø 64 | | 0...3.6 | 87 |
| | F80P06 | DN80 | | Ø 64 | | 0...3.6 | 87 |
| | F1HP06 | DN100 | | Ø 64 | | 0...3.6 | 87 |
| DRM-629 PN 16  | F25P16 | DN25 | Flange to EN1092-1, capillary | Ø 24 | 482 °F | 0...23.2 | 232 |
| | F32P16 | DN32 | | Ø 30 | | 0...23.2 | 232 |
| | F40P16 | DN40 | | Ø 38 | | 0...8.7 | 232 |
| | F50P16 | DN50 | | Ø 48 | | 0...5.8 | 232 |
| | F65P16 | DN65 | | Ø 64 | | 0...3.6 | 232 |
| | F80P16 | DN80 | | Ø 64 | | 0...3.6 | 232 |
| | F1HP16 | DN100 | | Ø 64 | | 0...3.6 | 232 |
| DRM-629 PN 40  | F25P40 | DN25 | Flange to EN1092-1, capillary | Ø 24 | 482 °F | 0...23.2 | 580 |
| | F32P40 | DN32 | | Ø 30 | | 0...23.2 | 580 |
| | F40P40 | DN40 | | Ø 38 | | 0...8.7 | 580 |
| | F50P40 | DN50 | | Ø 48 | | 0...5.8 | 580 |
| | F65P40 | DN65 | | Ø 64 | | 0...3.6 | 580 |
| | F80P40 | DN80 | | Ø 64 | | 0...3.6 | 580 |
| | F1HP40 | DN100 | | Ø 64 | | 0...3.6 | 580 |
| DRM 630 PVC  | R08 | G ¼ female | Fixed female, direct | Ø 64 | 104 °F | 0...3.6 | 145 |
| | R15 | G ½ female | | Ø 64 | | 0...3.6 | 145 |
| | N15 | ½ NPT female | | Ø 64 | | 0...3.6 | 145 |
| DRM-630/1 PVC  | R08 | G ¼ female | Fixed female, capillary | Ø 64 | 104 °F | 0...3.6 | 145 |
| | R15 | G ½ female | | Ø 64 | | 0...3.6 | 145 |
| | N15 | ½ NPT female | | Ø 64 | | 0...3.6 | 145 |
| DRM-631 PP  | R08 | G ¼ female | Fixed female, direct | Ø 64 | 104 °F | 0...3.6 | 145 |
| | R15 | G ½ female | | Ø 64 | | 0...3.6 | 145 |
| | N15 | ½ NPT female | | Ø 64 | | 0...3.6 | 145 |
| DRM-631/1 PP  | R08 | G ¼ female | Fixed female, capillary | Ø 64 | 104 °F | 0...3.6 | 145 |
| | R15 | G ½ female | | Ø 64 | | 0...3.6 | 145 |
| | N15 | ½ NPT female | | Ø 64 | | 0...3.6 | 145 |
| DRM-632 PVDF  | R08 | G ¼ female | Fixed female, direct | Ø 64 | 122 °F | 0...3.6 | 232 |
| | R15 | G ½ female | | Ø 64 | | 0...3.6 | 232 |
| | N15 | ½ NPT female | | Ø 64 | | 0...3.6 | 232 |
| DRM-632/1 PVDF  | R08 | G ¼ female | Fixed female, capillary | Ø 64 | 122 °F | 0...3.6 | 232 |
| | R15 | G ½ female | | Ø 64 | | 0...3.6 | 232 |
| | N15 | ½ NPT female | | Ø 64 | | 0...3.6 | 232 |

No responsibility taken for errors;
subject to change without prior notice.



Diaphragm Seal Models (Direct or Remote Assembly)







| Model DRM | Size Code | Size | Note | Ø Diaphragm | Max. Media Temperature | Min. Span (PSIG) | Max. Span (PSIG) |
|------------------------------------------------------------------------------------------------------------|-----------|--------|-------------------------------------|-------------|------------------------|------------------|------------------|
|  DRM-633 | F50 | DN 50 | Flange to DIN2527 Form C, direct | Ø 64 | 212 °F | 0...3.6 | 580 |
| | F1H | DN 100 | | Ø 64 | | 0...3.6 | 580 |
|  DRM-633/1 | F50 | DN 50 | Flange to DIN2527 Form C, capillary | Ø 64 | 482 °F | 0...3.6 | 580 |
| | F1H | DN 100 | | Ø 64 | | 0...3.6 | 580 |
|  DRM-634 150 lbs | A25P150 | 1" | Flange to ASME B16.5, direct | Ø 30 | 176 °F | 0...23.2 | 145 |
| | A32P150 | 1¼" | | Ø 38 | | 0...8.7 | 145 |
| | A40P150 | 1½" | | Ø 38 | | 0...8.7 | 145 |
| | A50P150 | 2" | | Ø 48 | | 0...5.8 | 145 |
| | A65P150 | 2½" | | Ø 48 | | 0...5.8 | 145 |
| | A80P150 | 3" | | Ø 64 | | 0...3.6 | 145 |
| | A90P150 | 3½" | | Ø 64 | | 0...3.6 | 145 |
| | A1HP150 | 4" | | Ø 64 | | 0...3.6 | 145 |
|  DRM-634 300 lbs | A25P300 | 1" | Flange to ASME B16.5, direct | Ø 30 | 176 °F | 0...23.2 | 290 |
| | A32P300 | 1¼" | | Ø 38 | | 0...8.7 | 290 |
| | A40P300 | 1½" | | Ø 38 | | 0...8.7 | 290 |
| | A50P300 | 2" | | Ø 48 | | 0...5.8 | 290 |
| | A65P300 | 2½" | | Ø 48 | | 0...5.8 | 290 |
| | A80P300 | 3" | | Ø 64 | | 0...3.6 | 290 |
| | A90P300 | 3½" | | Ø 64 | | 0...3.6 | 290 |
| | A1HP300 | 4" | | Ø 64 | | 0...3.6 | 290 |
|  DRM-634 600 lbs | A25P600 | 1" | Flange to ASME B16.5, direct | Ø 30 | 176 °F | 0...23.2 | 580 |
| | A32P600 | 1¼" | | Ø 38 | | 0...8.7 | 580 |
| | A40P600 | 1½" | | Ø 38 | | 0...8.7 | 580 |
| | A50P600 | 2" | | Ø 48 | | 0...5.8 | 580 |
| | A65P600 | 2½" | | Ø 48 | | 0...5.8 | 580 |
| | A80P600 | 3" | | Ø 64 | | 0...3.6 | 580 |
| | A90P600 | 3½" | | Ø 64 | | 0...3.6 | 580 |
| | A1HP600 | 4" | | Ø 64 | | 0...3.6 | 580 |
|  DRM-634 1500 lbs | A25P1K5 | 1" | Flange to ASME B16.5, direct | Ø 30 | 176 °F | 0...23.2 | 1450 |
| | A32P1K5 | 1¼" | | Ø 38 | | 0...8.7 | 1450 |
| | A40P1K5 | 1½" | | Ø 38 | | 0...8.7 | 1450 |
| | A50P1K5 | 2" | | Ø 48 | | 0...5.8 | 1450 |
| | A65P1K5 | 2½" | | Ø 48 | | 0...5.8 | 1450 |
| | A80P1K5 | 3" | | Ø 64 | | 0...3.6 | 1450 |
| | A90P1K5 | 3½" | | Ø 64 | | 0...3.6 | 1450 |
| | A1HP1K5 | 4" | | Ø 64 | | 0...3.6 | 1450 |
|  DRM-635 150 lbs | A25P150 | 1" | Flange to ASME B16.5, capillary | Ø 30 | 482 °F | 0...23.2 | 145 |
| | A32P150 | 1¼" | | Ø 38 | | 0...8.7 | 145 |
| | A40P150 | 1½" | | Ø 38 | | 0...8.7 | 145 |
| | A50P150 | 2" | | Ø 48 | | 0...5.8 | 145 |
| | A65P150 | 2½" | | Ø 48 | | 0...5.8 | 145 |
| | A80P150 | 3" | | Ø 64 | | 0...3.6 | 145 |
| | A90P150 | 3½" | | Ø 64 | | 0...3.6 | 145 |
| | A1HP150 | 4" | | Ø 64 | | 0...3.6 | 145 |

No responsibility taken for errors; subject to change without prior notice.



Heavy Duty Pressure Transmitter Model PAS







Diaphragm Seal Models (Direct or Remote Assembly)

| Model DRM | Size Code | Size | Note | Ø Diaphragm | Max. Media Temperature | Min. Span (PSIG) | Max. Span (PSIG) |
|-----------------------------------------------------------------------------------------------------------------|-----------|-------|---------------------------------|-------------|------------------------|------------------|------------------|
| DRM-635 300 lbs  | A25P300 | 1" | Flange to ASME B16.5, capillary | Ø 30 | 482 °F | 0...23.2 | 290 |
| | A32P300 | 1¼" | | Ø 38 | | 0...8.7 | 290 |
| | A40P300 | 1½" | | Ø 38 | | 0...8.7 | 290 |
| | A50P300 | 2" | | Ø 48 | | 0...5.8 | 290 |
| | A65P300 | 2½" | | Ø 48 | | 0...5.8 | 290 |
| | A80P300 | 3" | | Ø 64 | | 0...3.6 | 290 |
| | A90P300 | 3½" | | Ø 64 | | 0...3.6 | 290 |
| | A1HP300 | 4" | | Ø 64 | | 0...3.6 | 290 |
| DRM-635 600 lbs  | A25P600 | 1" | Flange to ASME B16.5, capillary | Ø 30 | 482 °F | 0...23.2 | 580 |
| | A32P600 | 1¼" | | Ø 38 | | 0...8.7 | 580 |
| | A40P600 | 1½" | | Ø 38 | | 0...8.7 | 580 |
| | A50P600 | 2" | | Ø 48 | | 0...5.8 | 580 |
| | A65P600 | 2½" | | Ø 48 | | 0...5.8 | 580 |
| | A80P600 | 3" | | Ø 64 | | 0...3.6 | 580 |
| | A90P600 | 3½" | | Ø 64 | | 0...3.6 | 580 |
| | A1HP600 | 4" | | Ø 64 | | 0...3.6 | 580 |
| DRM-635 1500 lbs  | A25P1K5 | 1" | Flange to ASME B16.5, capillary | Ø 30 | 482 °F | 0...23.2 | 1450 |
| | A32P1K5 | 1¼" | | Ø 38 | | 0...8.7 | 1450 |
| | A40P1K5 | 1½" | | Ø 38 | | 0...8.7 | 1450 |
| | A50P1K5 | 2" | | Ø 48 | | 0...5.8 | 1450 |
| | A65P1K5 | 2½" | | Ø 48 | | 0...5.8 | 1450 |
| | A80P1K5 | 3" | | Ø 64 | | 0...3.6 | 1450 |
| | A90P1K5 | 3½" | | Ø 64 | | 0...3.6 | 1450 |
| | A1HP1K5 | 4" | | Ø 64 | | 0...3.6 | 1450 |
| DRM-637 PN 06  | F25P06 | DN25 | Flange to EN1092-1, direct | Ø 24 | 176 °F | 0...23.2 | 87 |
| | F32P06 | DN32 | | Ø 30 | | 0...23.2 | 87 |
| | F40P06 | DN40 | | Ø 38 | | 0...14.5 | 87 |
| | F50P06 | DN50 | | Ø 48 | | 0...8.7 | 87 |
| | F65P06 | DN65 | | Ø 64 | | 0...3.6 | 87 |
| | F80P06 | DN80 | | Ø 64 | | 0...3.6 | 87 |
| | N1HP06 | DN100 | | Ø 64 | | 0...3.6 | 87 |
| DRM-637 PN 16  | F25P16 | DN25 | Flange to EN1092-1, direct | Ø 24 | 176 °F | 0...23.2 | 232 |
| | F32P16 | DN32 | | Ø 30 | | 0...23.2 | 232 |
| | F40P16 | DN40 | | Ø 38 | | 0...14.5 | 232 |
| | F50P16 | DN50 | | Ø 48 | | 0...8.7 | 232 |
| | F65P16 | DN65 | | Ø 64 | | 0...3.6 | 232 |
| | F80P16 | DN80 | | Ø 64 | | 0...3.6 | 232 |
| | N1HP16 | DN100 | | Ø 64 | | 0...3.6 | 232 |
| DRM-637 PN 40  | F25P40 | DN25 | Flange to EN1092-1, direct | Ø 24 | 176 °F | 0...23.2 | 580 |
| | F32P40 | DN32 | | Ø 30 | | 0...23.2 | 580 |
| | F40P40 | DN40 | | Ø 38 | | 0...14.5 | 580 |
| | F50P40 | DN50 | | Ø 48 | | 0...8.7 | 580 |
| | F65P40 | DN65 | | Ø 64 | | 0...3.6 | 580 |
| | F80P40 | DN80 | | Ø 64 | | 0...3.6 | 580 |
| | N1HP40 | DN100 | | Ø 64 | | 0...3.6 | 580 |

No responsibility taken for errors;
subject to change without prior notice.



Diaphragm Seal Models (Direct or Remote Assembly) (Continued)






| Model DRM | Code | Size | Note | Ø Diaphragm | Max. Media Temperature | Min. Span (PSIG) | Max. Span (PSIG) |
|------------------------------------------------------------------------------------------------------------------|---------|-------|-------------------------------|-------------|------------------------|------------------|------------------|
| DRM-638 PN06  | F25P06 | DN25 | Flange to EN1092-1, capillary | Ø 24 | 482 °F | 0...23.2 | 87 |
| | F32P06 | DN32 | | Ø 30 | | 0...23.2 | 87 |
| | F40P06 | DN40 | | Ø 38 | | 0...14.5 | 87 |
| | F50P06 | DN50 | | Ø 48 | | 0...8.7 | 87 |
| | F65P06 | DN65 | | Ø 64 | | 0...3.6 | 87 |
| | F80P06 | DN80 | | Ø 64 | | 0...3.6 | 87 |
| | F1HP06 | DN100 | | Ø 64 | | 0...3.6 | 87 |
| DRM-638 PN16  | F25P16 | DN25 | Flange to EN1092-1, capillary | Ø 24 | 482 °F | 0...23.2 | 232 |
| | F32P16 | DN32 | | Ø 30 | | 0...23.2 | 232 |
| | F40P16 | DN40 | | Ø 38 | | 0...14.5 | 232 |
| | F50P16 | DN50 | | Ø 48 | | 0...8.7 | 232 |
| | F65P16 | DN65 | | Ø 64 | | 0...3.6 | 232 |
| | F80P16 | DN80 | | Ø 64 | | 0...3.6 | 232 |
| | F1HP16 | DN100 | | Ø 64 | | 0...3.6 | 232 |
| DRM-638 PN40  | F25P40 | DN25 | Flange to EN1092-1, capillary | Ø 24 | 482 °F | 0...23.2 | 580 |
| | F32P40 | DN32 | | Ø 30 | | 0...23.2 | 580 |
| | F40P40 | DN40 | | Ø 38 | | 0...14.5 | 580 |
| | F50P40 | DN50 | | Ø 48 | | 0...8.7 | 580 |
| | F65P40 | DN65 | | Ø 64 | | 0...3.6 | 580 |
| | F80P40 | DN80 | | Ø 64 | | 0...3.6 | 580 |
| | F1HP40 | DN100 | | Ø 64 | | 0...3.6 | 580 |
| DRM-639 150 lbs  | A25P150 | 1" | Flange to ASME B16.5, direct | Ø 30 | 176 °F | 0...15 | 145 |
| | A32P150 | 1¼" | | Ø 38 | | 0...15 | 145 |
| | A40P150 | 1½" | | Ø 38 | | 0...15 | 145 |
| | A50P150 | 2" | | Ø 48 | | 0...10 | 145 |
| | A63P150 | 2½" | | Ø 48 | | 0...10 | 145 |
| | A75P150 | 3" | | Ø 64 | | 0...4 | 145 |
| | A85P150 | 3½" | | Ø 64 | | 0...4 | 145 |
| A1HP150 | 4" | Ø 64 | 0...4 | 145 | | | |
| DRM-639 300 lbs  | A25P300 | 1" | Flange to ASME B16.5, direct | Ø 30 | 176 °F | 0...15 | 290 |
| | A32P300 | 1¼" | | Ø 38 | | 0...15 | 290 |
| | A40P300 | 1½" | | Ø 38 | | 0...15 | 290 |
| | A50P300 | 2" | | Ø 48 | | 0...10 | 290 |
| | A63P300 | 2½" | | Ø 48 | | 0...10 | 290 |
| | A75P300 | 3" | | Ø 64 | | 0...4 | 290 |
| | A85P300 | 3½" | | Ø 64 | | 0...4 | 290 |
| A1HP300 | 4" | Ø 64 | 0...4 | 290 | | | |
| DRM-639 600 lbs  | A25P600 | 1" | Flange to ASME B16.5, direct | Ø 30 | 176 °F | 0...15 | 580 |
| | A32P600 | 1¼" | | Ø 38 | | 0...15 | 580 |
| | A40P600 | 1½" | | Ø 38 | | 0...15 | 580 |
| | A50P600 | 2" | | Ø 48 | | 0...10 | 580 |
| | A63P600 | 2½" | | Ø 48 | | 0...10 | 580 |
| | A75P600 | 3" | | Ø 64 | | 0...4 | 580 |
| | A85P600 | 3½" | | Ø 64 | | 0...4 | 580 |
| A1HP600 | 4" | Ø 64 | 0...4 | 580 | | | |

No responsibility taken for errors; subject to change without prior notice.



Heavy Duty Pressure Transmitter Model PAS





Diaphragm Seal Models (Direct or Remote Assembly) (Continued)

| Model DRM | Size Code | Size | Note | Ø Diaphragm | Max. Media Temperature | Min. Span (PSIG) | Max. Span (PSIG) |
|-------------------------------------------------------------------------------------------------------------------|-----------|------|---------------------------------|-------------|------------------------|------------------|------------------|
| DRM-639 1500 lbs  | A25P1K5 | 1" | Flange to ASME B16.5, direct | Ø 30 | 176 °F | 0...15 | 1450 |
| | A32P1K5 | 1¼" | | Ø 38 | | 0...15 | 1450 |
| | A40P1K5 | 1½" | | Ø 38 | | 0...15 | 1450 |
| | A50P1K5 | 2" | | Ø 48 | | 0...10 | 1450 |
| | A63P1K5 | 2½" | | Ø 48 | | 0...10 | 1450 |
| | A75P1K5 | 3" | | Ø 64 | | 0...4 | 1450 |
| | A1HP1K5 | 4" | | Ø 64 | | 0...4 | 1450 |
| DRM-640 150 lbs  | A25P150 | 1" | Flange to ASME B16.5, capillary | Ø 30 | 482 °F | 0...15 | 145 |
| | A32P150 | 1¼" | | Ø 38 | | 0...15 | 145 |
| | A40P150 | 1½" | | Ø 38 | | 0...15 | 145 |
| | A50P150 | 2" | | Ø 48 | | 0...10 | 145 |
| | A63P150 | 2½" | | Ø 48 | | 0...10 | 145 |
| | A75P150 | 3" | | Ø 64 | | 0...4 | 145 |
| | A85P150 | 3½" | | Ø 64 | | 0...4 | 145 |
| A1HP150 | 4" | Ø 64 | 0...4 | 145 | | | |
| DRM-640 300 lbs  | A25P300 | 1" | Flange to ASME B16.5, capillary | Ø 30 | 482 °F | 0...15 | 290 |
| | A32P300 | 1¼" | | Ø 38 | | 0...15 | 290 |
| | A40P300 | 1½" | | Ø 38 | | 0...15 | 290 |
| | A50P300 | 2" | | Ø 48 | | 0...10 | 290 |
| | A63P300 | 2½" | | Ø 48 | | 0...10 | 290 |
| | A75P300 | 3" | | Ø 64 | | 0...4 | 290 |
| | A85P300 | 3½" | | Ø 64 | | 0...4 | 290 |
| A1HP300 | 4" | Ø 64 | 0...4 | 290 | | | |
| DRM-640 600 lbs  | A25P600 | 1" | Flange to ASME B16.5, capillary | Ø 30 | 482 °F | 0...15 | 580 |
| | A32P600 | 1¼" | | Ø 38 | | 0...15 | 580 |
| | A40P600 | 1½" | | Ø 38 | | 0...15 | 580 |
| | A50P600 | 2" | | Ø 48 | | 0...10 | 580 |
| | A63P600 | 2½" | | Ø 48 | | 0...10 | 580 |
| | A75P600 | 3" | | Ø 64 | | 0...4 | 580 |
| | A85P600 | 3½" | | Ø 64 | | 0...4 | 580 |
| A1HP600 | 4" | Ø 64 | 0...4 | 580 | | | |
| DRM-640 1500 lbs  | A25P1K5 | 1" | Flange to ASME B16.5, capillary | Ø 30 | 482 °F | 0...15 | 1450 |
| | A32P1K5 | 1¼" | | Ø 38 | | 0...15 | 1450 |
| | A40P1K5 | 1½" | | Ø 38 | | 0...15 | 1450 |
| | A50P1K5 | 2" | | Ø 48 | | 0...10 | 1450 |
| | A63P1K5 | 2½" | | Ø 48 | | 0...10 | 1450 |
| | A75P1K5 | 3" | | Ø 64 | | 0...4 | 1450 |
| | A1HP1K5 | 4" | | Ø 64 | | 0...4 | 1450 |

No responsibility taken for errors; subject to change without prior notice.



Diaphragm Seal Models (Direct or Remote Assembly) (Continued)

| Model DRM | Size Code | Size | Note | Ø Diaphragm | Max. Media Temperature | Min. Span (PSIG) | Max. Span (PSIG) |
|----------------------------------------------------------------------------------------------------------------------------|-----------|-------|-------------------|-------------|------------------------|------------------|------------------|
| DRM 500 ISO Sterile  | D15 | DN 15 | Inline, direct | Inline | 176 °F | 0...23.2 | 580 |
| | D20 | DN20 | | Inline | | 0...23.2 | 580 |
| | D25 | DN25 | | Inline | | 0...8.7 | 580 |
| | D32 | DN32 | | Inline | | 0...8.7 | 580 |
| | D40 | DN40 | | Inline | | 0...5.8 | 580 |
| | D50 | DN50 | | Inline | | 0...5.8 | 580 |
| DRM 501 ISO Sterile  | D15 | DN 15 | Inline, capillary | Inline | 176 °F | 0...23.2 | 580 |
| | D20 | DN20 | | Inline | | 0...23.2 | 580 |
| | D25 | DN25 | | Inline | | 0...8.7 | 580 |
| | D32 | DN32 | | Inline | | 0...8.7 | 580 |
| | D40 | DN40 | | Inline | | 0...5.8 | 580 |
| | D50 | DN50 | | Inline | | 0...5.8 | 580 |
| DRM 502 Clamp ISO 2852  | D15 | DN 15 | Inline, direct | Inline | 176 °F | 0...23.2 | 580 |
| | D20 | DN20 | | Inline | | 0...23.2 | 580 |
| | D25 | DN25 | | Inline | | 0...8.7 | 580 |
| | D32 | DN32 | | Inline | | 0...8.7 | 580 |
| | D40 | DN40 | | Inline | | 0...5.8 | 580 |
| | D50 | DN50 | | Inline | | 0...5.8 | 580 |
| DRM 503 Clamp ISO 2852  | D15 | DN 15 | Inline, capillary | Inline | 176 °F | 0...23.2 | 580 |
| | D20 | DN20 | | Inline | | 0...23.2 | 580 |
| | D25 | DN25 | | Inline | | 0...8.7 | 580 |
| | D32 | DN32 | | Inline | | 0...8.7 | 580 |
| | D40 | DN40 | | Inline | | 0...5.8 | 580 |
| | D50 | DN50 | | Inline | | 0...5.8 | 580 |