Polypropylene Float Level Switch

for Start/Stop Pump Control



measuring • monitoring

•

analyzing

NAB

- Polypropylene Float
 - 10 or 30 ft. Neoprene Cable
- Max. Pressure: 50 PSIG (3.5 bar)
- Max. Temperature: 185 °F (85 °C)
- Media Density: 0.7...1.15 S.G.
- SPDT Mechanical Switch Changeover Contact
- Connectable as N/C or N/O



Order from: C A Briggs Company


622 Mary Street; Suite 101; Warminster, PA 18974 Phone: 267-673-8117 - Fax: 267-673-8118 Sales@cabriggs.com - www.cabriggs.com



Description

The KOBOLD NAB Series float level switch for liquids provides mercury-free level switching for tank applications requiring high current capability. With such capacities, pumps may be directly controlled in many applications. This float-type, till level switch for stop/start pump control features an industrial-quality polypropylene float with an SPDT mechanical switch, connectable as normally closed (N/C) or normally open (N/O), with IP68 protection. It comes with a Neoprene®-jacketed, three-conductor cable in standard lengths of 10' or 30', with custom cable lengths available on request.



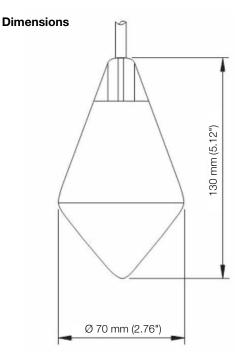

Specifications

Float Material: Cable:	Polypropylene 10' or 30', Neoprene [®] (3-conductor) (Neoprene [®] is not recommended for certain highly corrosive or solvent- based applications)
Max. Presssure:	based applications) 50 PSIG (3.5 bar)
Max. Temperature:	185 °F (85 °C)
Media Density:	0.71.15 SG (kg/dm ³)
Contact:	SPDT Mechanical Switch Changeover,
	Connectable as N/O or N/C,
	Mercury Free
Switch Capacity:	Max. 250 VAC 50/60 Hz,
	20A Resistive Load, 8A Inductive Load
Weight:	Approx. 1 lb (0.45 kg) with 10' Cable
	Approx. 2.7 lbs (1.22 kg) with 30' Cable
Switching Angle:	Approx. +55° to Activate, -55° to Deactivate
	(Angles vary per installation, comparison use only)
Protection Class:	IP 68
Optional:	Ballast weight, loaded resin, 175 g


Order Details

Model	Description
NAB-W03	Conical Float, 10 ft. Neoprene Cable
NAB-W10	Conical Float, 30 ft. Neoprene Cable
NAB-BALLAST	Optional Ballast Weight

*Longer cable lengths are available upon requst, consult factory

Electrical Connection

blue



Order from: C A Briggs Company 622 Mary Street; Suite 101; Warminster, PA 18974 Phone: 267-673-8117 - Fax: 267-673-8118 Sales@cabriggs.com - www.cabriggs.com

No responsibility taken for errors; subject to change without prior notice.