


Helical-Gear Positive Displacement Flowmeter

For Viscous Media



measuring
•
monitoring
•
analyzing

OME

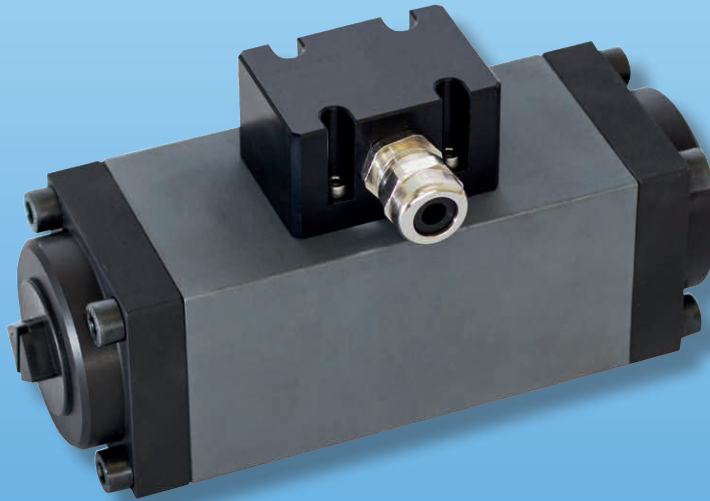

- Measuring Ranges (Liquid): 0.027...2.7 to 0.9...90 GPM
- Measuring Accuracy: $\pm 0.1\%$ of Measuring Span
- p_{\max} : 580 PSIG; t_{\max} : 257 °F
- Viscosity Range: 1 ... 1×10^6 mm²/s
- Connection: 1/2" ... 1-1/2" NPT
- Material: Aluminum
- Output: 2x PNP and Single Pt 100
- Quiet Operation
- Pulsation-Free Principle of Measurement



Order from: **C A Briggs Company**

622 Mary Street; Suite 101; Warminster, PA 18974

Phone: 267-673-8117 - Fax: 267-673-8118

Sales@cabriggs.com - www.cabriggs.com


KOBOLD Instruments, Inc.
1801 Parkway View Drive
Pittsburgh, PA 15205



Helical-Gear Positive Displacement Flowmeter Model OME

Description

KOBOLD OME compact flowmeters are extremely accurate with measurements of up to 0.1% possible. Because of the high quality ball bearings, friction and pressure loss are low. They offer bi-directional measurement. The sensor detects reverse flow and a temperature sensor is included. The electronic unit uses the flow direction information to calculate a precise measuring value. The turn-down ratio is 150:1. Neither upstream nor downstream flow requirements are required. Pipe elbows and T-pieces don't influence the measurement accuracy. The 3-in-1 sensor combines flow through metering, flow direction detection and temperature measurement. The fast response spindles can follow any rapid fluctuations in the flow. Flow sensor output are two square waves with 90° desynchronization for flow direction detection.

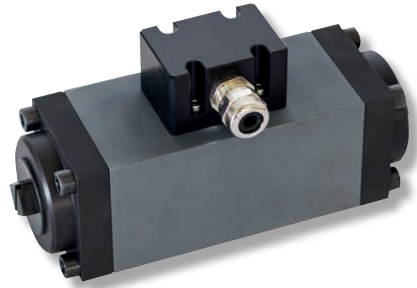


Technical Details

Wetted Materials

Housing:	Aluminum (Material no. 3.0615)
Spindles:	Nitrated Steel
O-rings:	FKM
Bearings:	Deep-grooved Ball Bearing
Connections:	Aluminum (Material no. 3.0615)
Temp. Range:	-4...257 °F
Max. Pressure:	580 PSIG
Accuracy:	± 0.1% of Measured Value
Filter:	≤300 μm

Pressure Loss Diagram

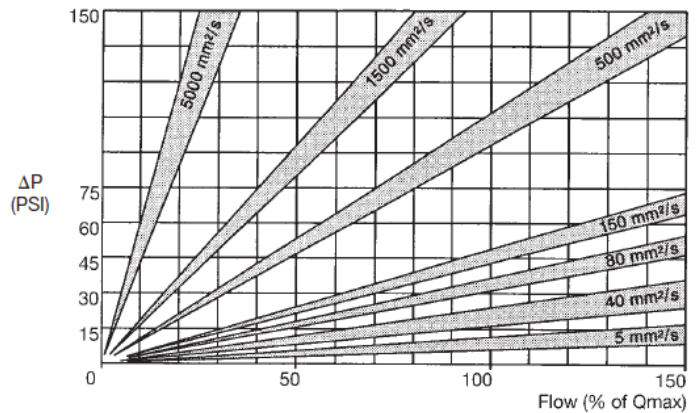

Order Details* (Example: OME-15N15)

Model	Nominal Flow Rate	Connection ¹⁾	K-factor pulses/gal	Frequency ²⁾ at Q _{nominal}
OME-15N15	0.027...2.7 GPM	1/2" NPT	4595	202 Hz
OME-20N20	0.08...8.0 GPM	3/4" NPT	1215	161 Hz
OME-25N25	0.27...27.0 GPM	1" NPT	295	130 Hz
OME-40N40	0.90...90.0 GPM	1-1/2" NPT	67	104 Hz

¹⁾ Other connections upon request

²⁾ Please refer to the accompanying test certificate for exact values.

* With your order, please also submit the media type, viscosity and operating temperature

Dimensions and Weights

NPT Thread

Model	D	L1	L2	H1	H2	Weight (lbs)
OME-15..	1.77" x 1.77"	4.33"	2.56"	3.23"	2.34"	1.5
OME-20..	2.17" x 2.17"	5.71"	3.74"	3.62"	2.54"	2.6
OME-25..	2.76" x 2.76"	7.87"	5.51"	4.21"	2.83"	6.6
OME-40..	4.33" x 4.33"	12.20"	8.86"	5.19"	3.62"	19.8

