

Electronic Pressure Switch



measuring
•
monitoring
•
analyzing

PDD



PDD-15
PDD-25

PDD-55
PDD-75

- Measuring Range: -30...0" Hg to 0...5800 PSI
or -1...0 bar to 0...400 bar
- Max. Temperature: 176 °F
- Accuracy: $\pm 0.5\%$ of Full Scale ($\pm 1.0\%$ of Full Scale for Ranges ≤ 30 PSI)
- Housing / Fitting Material: Stainless Steel
- Connection: $\frac{1}{4}$ " NPT, $\frac{1}{2}$ " NPT, G $\frac{1}{4}$, or G $\frac{1}{2}$



Order from: **C A Briggs Company**

622 Mary Street; Suite 101; Warminster, PA 18974

Phone: 267-673-8117 - Fax: 267-673-8118

Sales@cabriggs.com - www.cabriggs.com

KOBOLD Instruments, Inc.
1801 Parkway View Drive
Pittsburgh, PA 15205




Electronic Pressure Switch Model PDD

Description

The KOBOLD pressure switch, model PDD, is a cost effective, electronic pressure switch with digital indication of actual pressure. One or two switch points, on/off-switch delay, and hysteresis are within the programming parameters. A piezoresistive ceramic sensor is used for high cycle life and the sensors can be used where high switching accuracy is needed. Long term stability, repeatability, and a compact robust design makes the PDD an ideal sensor for use in many OEM applications. Common applications include: compressor monitoring, installations, the machinery industry, and pumps.

Dimensions (mm)

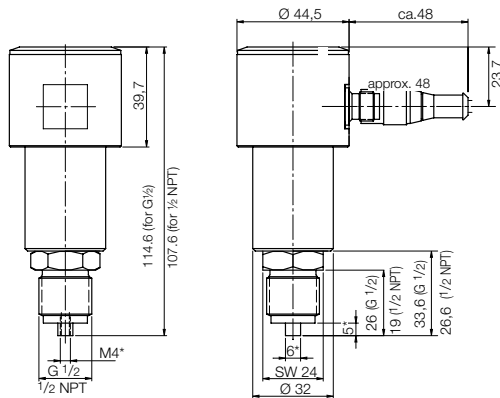

*No Nipple on NPT Thread
(1/4" male connection available as option)

Technical Details

Housing:	303 Stainless Steel
Process Connection:	1/4" or 1/2" NPT 316 L Stainless Steel Option G 1/4 or G 1/2 Male (Others on Request)
Gasket:	FKM (Option: EPDM)
Sensor Element:	Piezoresistive Ceramic Cell
Indication:	3-digit LED, Height 7 mm
Resolution:	Max. 0.2 PSI (Depending on Measuring Range and Measured Value)
Max. Media Temp.:	-4 ... 176 °F
Max. Ambient Temp.:	-4 ... 176 °F
Max. Over Pressure:	Up to 870 PSI: 3x Range From 1450 PSI: 2x Range 5800 PSI: 1.5x Range
Supply Voltage:	24 V _{DC} ± 20 %
Power Consumption:	Approx. 100 mA (without Switching Output)
Electrical Connection:	M12x1 Plug
Switching Output:	1x or 2x PNP or NPN Semiconductor, Max. 300 mA, Short-circuit Proof
Contact:	N/O or N/C, Programmable
Switch Point Adj.:	Programmable via 2 Buttons
Output Indicator:	1 LED
Hysteresis:	Adjustable via 2 Buttons
ON/OFF-switch. Delay:	0.5 ... 99.5 s (Separately Adjustable)
Response Time:	0.5 s
Accuracy:	± 0.5 % of f. s. (± 1.0 % of f. s. for Measuring Range: ≤ 30 PSI)
Protection:	IP 65

Order Details (Example: PDD-15 3 N2 P065)

Model	Output	Electrical Connection	Process Connection	Measuring Range (barG)	Measuring Range (PSIG)
PDD-	..15.. = 1x PNP Switch Output	..3.. = Plug M12x1	..N2.. = 1/4" NPT	..C315 = -1...0	..H315 = -30...0 in Hg
	..25.. = 1x NPN Switch Output		..N4.. = 1/2" NPT	..B025 = 0...1	..P025 = 0...15
	..55.. = 2x PNP Switch Outputs		..R2.. = G 1/4	..B035 = 0...1.6	..P045 = 0...30
	..75.. = 2x NPN Switch Outputs		..R4.. = G 1/2	..B045 = 0...2.5	..P055 = 0...50
				..B055 = 0...4	..P065 = 0...100
				..B065 = 0...6	..P075 = 0...150
				..B075 = 0...10	..P085 = 0...200
				..B085 = 0...16	..P095 = 0...350
				..A095 = 0...25	..P105 = 0...600
				..A105 = 0...40	..P115 = 0...1000
				..A115 = 0...60	..P125 = 0...1450
				..A125 = 0...100	..P135 = 0...2300
				..A135 = 0...160	..P145 = 0...3600
				..A145 = 0...250	..P155 = 0...5800
				..A155 = 0...400	..E = Custom*

Accessory: Mating Electrical Cable

*Please specify custom range as a note on your order

Description	Item #
M12 Micro-DC, 4-pin 6 foot Cable	807.037
M12 Micro-DC, 4-pin 16 foot Cable	807.037/5M