





LevALERT Model 760

Bin Level Indicators

FULL OR LOW, LEVALERT LETS YOU KNOW.
In one quick glance, know the level of material in your bin.

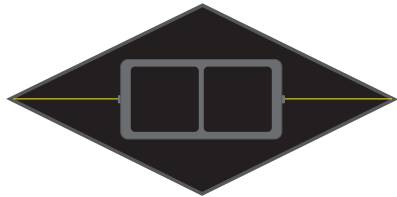

**REMAINS BLACK
WHEN MATERIAL IS
BELOW INDICATOR**

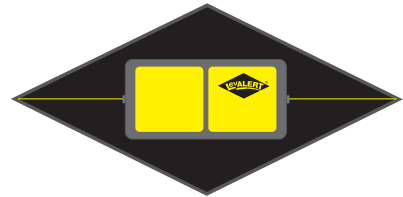

**ROTATES TO YELLOW
WHEN MATERIAL IS AT
OR ABOVE INDICATOR**

TOP BENEFITS



STAY SAFE

Know your bin levels from the ground. Avoid climbing dangerous bin ladders and stairs.



PLANNING AID

Install indicators to provide a signal on when to stop filling, order product, turn on a motor, etc.



DEPENDABLE

You can trust our bin level indicators to work all of the time, in even the harshest of conditions.
5 year warranty!



HIGHLY VISIBLE

Premium 3M reflective indicator easily visible day or night from over 300 feet.



NO ELECTRICITY NEEDED


Completely mechanical operation. Automatically resets.




EASY INSTALLATION

Install our bin level indicators in under 5 minutes from the outside of the bin.


COMMON BIN TYPES




WET/DRY HOLDING BINS




OVERHEAD
BINS



FEED BINS



SEED BINS



INDUSTRIAL BINS



CORRUGATED
OR SMOOTH

POPULAR USES



GRAINS



FEEDS



SEEDS



POWDERS



FERTILIZER



PLASTIC
PELLETS



SAND



SALT


Order from: **C A Briggs Company**; 622 Mary Street; Suite 101 - Warminster, PA 18974
Phone: 267-673-8117 - Fax: 267-673-8118; E-Mail: Sales@cabriggs.com - www.cabriggs.com



LevALERT Model 760

Bin Level Indicators

LEVALERT MODEL 760

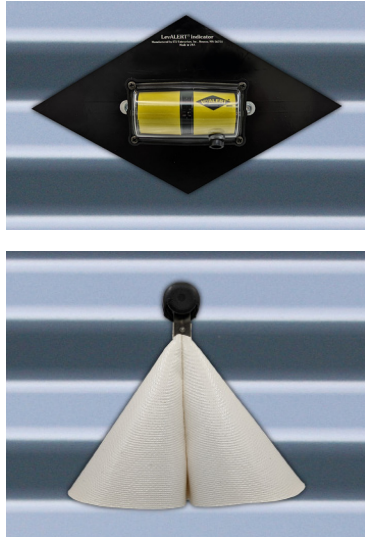

PRODUCT HIGHLIGHTS



Conical shaped Activator is made out of silicon coated fiberglass.

Smaller Indicator size than Model 9700.

Comes fully assembled for fast installation.

PART NUMBER	WEIGHT RANGE	GREAT FOR
760	10-70 lbs. / cubic foot tolerance	Great for grains/feeds

760 Specifications

Installs on outside of bin, corrugated or flat wall bin styles up to 3/8" in thickness.

Operates effectively at temperatures between +180F (82C) to -30F (-35C).

Pat. 10,408,659, Pat. 10,557,740, Pat. D848,874

5 Year Warranty on Bin Level Indicators.

PREMIUM MATERIALS

1

Corrosion resistant, UV stable, high strength plastic components. **Won't fade or crack, and lens won't yellow!**

2

Premium 3M reflective indicator. **Easily visible from over 300 feet!**

3

Moisture-proof bin seal. **Seals indicator to the bin!**



Manufactured by LevALERT, Inc. Minnetonka, MN levalert.com



OPTIONAL MAGNETIC SENSOR

Expand the Indicator's capabilities by performing an electrical operation. Simply add the optional Magnetic Sensor to turn off and on motors or lights, sound a horn or alarm, etc.

ITEM ID	DESCRIPTION	TECHNICAL SPECIFICATIONS
A71	Magnetic Sensor Only AC/DC, contains both NO/NC circuitry	SPDT. Rated voltage: 125 VAC 3A, 250 VAC 2A, 30 VDC 3A. Cable length: 12"(304 mm) Approved Safety Standards: UL (UL1054)/CSA (CSA C22.2 No.55). RoSH Compliant
A72	Magnetic Sensor/Relay Kit Sensor plus AC-120 Relay (or DC12)	