





LevALERT Model 9700

Bin Level Indicators

FULL OR LOW, LEVALERT LETS YOU KNOW.
In one quick glance, know the level of material in your bin.

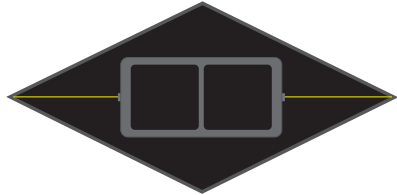

**REMAINS BLACK
WHEN MATERIAL IS
BELOW INDICATOR**

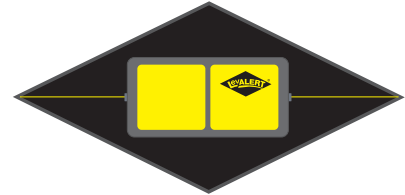

**ROTATES TO YELLOW
WHEN MATERIAL IS AT
OR ABOVE INDICATOR**

TOP BENEFITS



STAY SAFE

Know your bin levels from the ground. Avoid climbing dangerous bin ladders and stairs.



PLANNING AID

Install indicators to provide a signal on when to stop filling, order product, turn on a motor, etc.



DEPENDABLE

You can trust our bin level indicators to work all of the time, in even the harshest of conditions.
5 year warranty!



HIGHLY VISIBLE

Premium 3M reflective indicator easily visible day or night from over 300 feet.



NO ELECTRICITY NEEDED


Completely mechanical operation. Automatically resets.




EASY INSTALLATION

Install our bin level indicators in under 5 minutes from the outside of the bin.


COMMON BIN TYPES




WET/DRY HOLDING BINS




OVERHEAD BINS



FEED BINS



SEED BINS



INDUSTRIAL BINS



CORRUGATED
OR SMOOTH

POPULAR USES



GRAINS



FEEDS



SEEDS



POWDERS



FERTILIZER



PLASTIC
PELLETS



SAND



SALT

Order from: **C A Briggs Company**; 622 Mary Street; Suite 101 - Warminster, PA 18974
Phone: 267-673-8117 - Fax: 267-673-8118; E-Mail: Sales@cabriggs.com - www.cabriggs.com




LevALERT Model 9700

Bin Level Indicators

LEVALERT MODEL 9700

BEST SELLER!

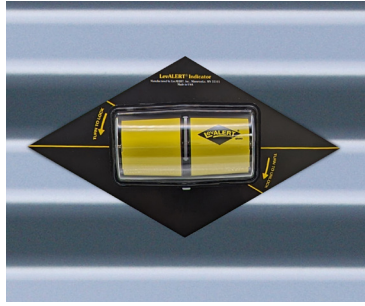

PRODUCT HIGHLIGHTS



Extra large indicator for high visibility.

Activator frame stays tight to bin wall. Ideal for high shear load applications and use with grain spreaders.

5" or 7" Activator Width.

Teflon coated silicone Activator.



Manufactured by
LevALERT, Inc.
Minnetonka, MN
levalert.com

9700 Specifications

Installs on outside of bin, corrugated or flat wall bin styles up to 3/8" in thickness.

Operates effectively at temperatures between +180F (82C) to -30F (-35C).

Pat. 10,408,659, Pat. 10,557,740, Pat. D848,874

5 Year Warranty on Bin Level Indicators.



OPTIONS

PART NUMBER	WEIGHT RANGE	GREAT FOR
9700-7 7" Activator width	10-55 lbs. / cubic foot tolerance	Great for corn, oats, sunflowers, ground feeds, grass seeds
9700-5 5" Activator width	55-100 lbs / cubic foot tolerance	Great for fertilizer, sand, salt, and cement powders

PREMIUM MATERIALS

1

Corrosion resistant, UV stable, high strength plastic components. **Won't fade or crack, and lens won't yellow!**

2

Premium 3M reflective indicator. **Easily visible from over 300 feet!**

3

Hermetically sealed lens to body. **No condensation.**

4

Moisture-proof bin seal. **Seals indicator to the bin!**

5


Activator frame secures tight to bin wall. **Material does not accumulate behind activator.**

6

Wear resistant Teflon coated silicone used for the activator. **Reduces abrasion & provides years of problem-free use!**



OPTIONAL MICRO-SWITCH



Expand the Indicator's capabilities by performing an electrical operation. Simply add the optional Micro-Switch to turn off and on motors or lights, sound a horn or alarm, etc.

ITEM ID	DESCRIPTION	TECHNICAL SPECIFICATIONS
A91	Micro-Switch Only	AC/DC, contains both NO/NC circuitry
A92 (AC or DC)	Micro-Switch / Relay Kit	Switch plus AC-120 Relay (or DC12)

Order from: **C A Briggs Company**; 622 Mary Street, Suite 101 - Warminster, PA 18974
Phone: 267-673-8117 - Fax: 267-673-8118; E-Mail: Sales@cabriggs.com - www.cabriggs.com