



Model 32CS

Heavy Duty Intrinsically Safe CSA Rated Pressure Transducer

The Model 32CS is designed for heavy duty applications in hazardous locations requiring intrinsic safety, top of the line performance, reliability, and stability at an affordable price. The Model 32CS offers exceptional $\pm 0.5\%$ FS accuracy in pressure ranges from 75 PSI to 32,000 PSI; features an all welded stainless steel construction for a robust design and IP67 seal for moisture and humidity protection. The Model 32CS offers a variety of different outputs, pressure connectors, and electrical connectors to satisfy the most challenging application requirements. In addition, voltage units are available with a dual pressure/temperature output. For ATEX/IECEx intrinsically safe pressure transducers, refer to Setra's 31IS and 32IS.

Built to Last

The Model 32CS is a heavy duty pressure device with long term stability, product reliability and accuracy built in. The compact welded stainless steel design is constructed to protect the sensor in the most demanding of industrial environments. The Model 32CS provides a 3X overpressure (0 to 10k PSI) and a 2.5x overpressure (10k to 14.5k PSI) rating, ensuring that the sensor does not fail during unexpected pressure spikes. The electrical connectors are tested to an environmental protection specification of IP67, and a robust internal design ensures that the transducers can survive high levels of vibration.

Best in Class Price-to-Performance

Strain Gauge technology provides a very linear and predictable output signal over a wide temperature range, which enables Setra to provide an inherently stable and accurate sensor element in high volumes and at low cost. The Model 32CS sensor is constructed using a highly sophisticated automation process, where the sensors are manufactured in a Class 100 clean room. To ensure best in class accuracy and long term stability, each sensing element is thermally compensated to an accuracy of less than $0.005\%^\circ\text{C}$ prior to leaving the clean room for final assembly. Thermally compensating the unit ensures improved accuracy and simplified conditioning of electronics, while eliminating the need for calibration over elevated temperatures as a transducer.

Unrivaled Quality

Setra understands the importance of quality in OEM applications, which is why we are always looking for ways to improve the quality rating of our products. Over the last two years, the Model 32CS failure rate is less than 0.1%, a quality rating unmatched by the competition. The worst thing that could happen to an engineer is to shut down their work because of quality issues. Setra takes this seriously, which is why we have worked hard to ensure that product quality issues will never be a concern for our customers.



- Premium Price-to-Performance
- High Quality: $<0.1\%$ Failure Rate
- Long Term Stability ($<0.1\%$ FS/YR)

Model 32CS Features:

- Class I, Division 1, Groups C & D
- Class I, Zone 0 Ex ia IIB T4 Ga
- Class I, Zone 0 AEx ia IIB T4 Ga
- No Oil Fill - Prevents Thermal Instability & Leakage
- Wide Choice of Pressure Ranges: 75 PSI-32,000 PSI
- $\pm 0.5\%$ FS Accuracy
- Dual Temperature and Pressure Output
- Small Footprint - Less than 1" Diameter
- Reverse Wiring Protection
- All Welded Stainless Steel Construction
- CE & UL Approved, RoHS Compliant
- IP67 Rated
- 40x FS Burst Pressure*

*Range Dependent

Applications:

- Natural Gas Test Equipment
- Gas Bottle Filling Plants
- Petroleum Processing
- Oil & Gas Drilling

Order from: **C A Briggs Company**; 622 Mary Street; Suite 101 - Warminster, PA 18974
Phone: 267-673-8117 - Fax: 267-673-8118; E-Mail: Sales@cabriggs.com - www.cabriggs.com

Model 32CS

Heavy Duty Intrinsically Safe
CSA Rated Pressure Transducer



GENERAL SPECIFICATIONS

Performance		Electrical Data	
Accuracy ¹ RSS	±0.5% FS	Voltage ³	
Long Term Drift	0.2% FS/YR (non-cumulative)	Output (3-Wire)	0V min to 10V max.
Thermal Error		Supply Voltage	1 Volt above full scale with min supply of 8V; max 30V at 4.5mA
32CS	±2% max	Source & Sinks	2 mA
Compensated Range	-40 to +176°F (-40 to +80°C)	Current ³	
Operating Temp	-40 to +176°F (-40 to +80°C)	Output (2-Wire)	4-20 mA
Zero Tolerance Max.	0.5% of Span	Supply Voltage	8-24 Volts measured at the input to the transducer terminals
Span Tolerance Max.	0.5% of Span	Max Loop Resistance	(Supply Voltage - 8) x 50 ohms. See Graph Below
Fatigue Life	Designed for more than 100M cycles	Ratiometric Output	
Physical Description		Output	0.5 to 4.5V (Source & Sink 2 mA)
Pressure Port	See Ordering Information	Supply Voltage	5 VDC ±10% at 4.5 mA
Wetted Parts ²	17-4 PH Stainless Steel (Diaphragm)	EMC Specifications	
Electrical Connection	See Ordering Information	Emission Tests:	EN61326-1:2006 and EN61326-2-3:2006
Enclosure	IP67 (IP65 for Electrical Code A)	EN55011:2007	Radiated Emissions: 30-230MHz 30dB µV/M @10M 230-1000MHz 37dB µV/M @10M
Vibration	BSEN 60068-2-6 (FC) Sine (20G) BSEN 60068-2-64 (FH) Random (14.1 Grms)	Immunity Tests:	EN61326-1:2006 and EN61326-2-3:2006
Shock	BSEN 60068-2-27 (Ea) (50G, 11ms)	EN61000-4-2:2009	Electrostatic Discharge: ±4Kv contact ±8Kv air
Weight (Configuration dependant.)	1.8 to 5.3 oz (50-150 grams).	EN61000-4-3:2006	Radiated Immunity: 10V/M 80-1000MHz 3V/M 1400-2000MHz 1V/M 2000-2700MHz
Zener Barrier & Entity Parameters		EN61000-4-4:2004	Fast Transients: ±0.25, 0.5, 1Kv
Zener Barrier Parameters		EN61000-4-6:2007	Conducted Immunity: 3V 0.15 to 80MHz 80% 1KHz modulation
Voltage	Ui = 30VDC	Entity Parameters	
Current	Li = 100mA	Signal Current	In = 4 to 20mA
Power	Pi = 0.7W	Effective Internal Capacitance	Ci = 323n
Entity Parameters		Effective Internal Inductance	Li = 9µh
Values to be added when supplied with integrated cable:			
Cable Capacitance	Ci = 300pF / m (max) Wire-to-Wire or Wire-to-Shield		
Cable Capacitance	Li = 2µH / m (max) Wire-to-Wire		



OVER-PRESSURE CAPABILITY

Pressure Range PSI (BAR)	Proof Pressure (x Full Scale)	Burst Pressure (x Full Scale)
75-300 (4-20)	3.00 x FS	40 x FS
500-1,500 (40-100)		20 x FS
2,000-6,000 (140-400)		10 x FS
10,000 (700)	2.50 x FS	>60,000 PSI (4,000 Bar)
15,000 (1,000)		
25,000 (1,800)		

The data in this table is "times rated ranges" (xRR)

Application pressure should be restricted to the rated-range of the transducer. The maximum overpressure is the pressure limit at which the transducer will not show significant offset shift. The minimum burst pressure is the test-rating for fluid containment.

WIRING

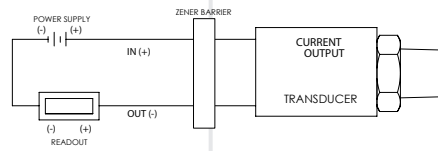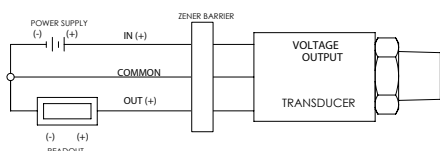

Order from: **C A Briggs Company**; 622 Mary Street; Suite 101 - Warminster, PA 18974
Phone: 267-673-8117 - Fax: 267-673-8118; E-Mail: Sales@cabriggs.com - www.cabriggs.com

Model 32CS

Heavy Duty Intrinsically Safe
CSA Rated Pressure Transducer



ELECTRICAL FITTINGS

M12			Deutsch DT01-4P		Industry Standard Form C		EN175301-803 (DIN 43650 A)		AMP Superseal 1,5 Series			METRIPACK T (150 SERIES)		
Code E			Code 8		Code R		Code G		Code 6			Code 9		
Pin #	Voltage	Current	Voltage	Current	Voltage	Current	Voltage	Current	Pin #	Voltage	Current	Pin #	Voltage	Current
1	+IN	+IN	0V	0V	+IN	+IN	+IN	+IN	1	+OP	DNC	A	0V	0V
2	+OP	DNC	+IN	+IN	0V	0V	0V	0V	2	0V	0V	B	+IN	+IN
3	0V	0V	NC	NC	+OP	DNC	+OP	DNC	3	+IN	+IN	C	+OP	DNC
4	NC	NC	+OP	DNC	NC	NC	NC	NC	Recommended Mating Connector: 282087-1 as housing, 183025-1 as contact (x3), 281934-3 as wire seal (x3), 880811-2 as protective boot (strain relief)			Recommended Mating Connector: 12065286 as connector body, 12052893 as con- nector seal. Consult Delphi Packard for appropriate contacts and wire seals.		
Recommended Mating Connector: To IEC 61076-2-101 Hirschmann, Brad Harrison, Lumberg			Recommended Mating Connector: DT0645-P012 as connector plug, W45-P012 as wedge, 0462-201-1631 as gold socket (x4)		Recommended Mating Connector: Hirschmann GDS 307 Part Number 933 024-100 or equivalent		Recommended Mating Connector: Molex/Brad/mPm Series 121201 (C28300N05) or equivalent							
Integrated Cable			<p>NOTES: DNC: Do Not Connect (Leave Floating). NC: Not Connected at Transducer End Alternative pin-outs are not available.</p> <p>The integrated cable is shielded. For compliance with EN 61000-4-5, shielded cable should be used on all transducers.</p> <p>WARNING: Substitution of Components May Impair Suitability For Intrinsic Safety</p>											
Code F														
Color	Voltage	Current												
Red	+IN	+IN												
Black	0V	0V												
White	+OP													

PRESSURE FITTINGS

SAE	1/8" - 27 NPT*	1/8" - 27 NPTF Dryseal	1/4" - 18 NPT	1/4" - 18 NPT Internal	1/4" - 18 NPTF Dryseal
Dimensions in Inches					
Fitting Code	08	4D	02	0E	4C
Torque	2-3 TFFT*	2-3 TFFT*	2-3 TFFT*	2-3 TFFT*	2-3 TFFT*
	SAE J1926/2:3/8-24 w/o O-Ring*	7/16" - 20 UNF w/ O-Ring*	7/16"-20 UNF w/37° Flare	SAE 4 Female 7/16" Schraeder	9/16"-18 "Heavy Duty" w/ O-Ring
Dimensions in Inches					
Fitting Code	4N	1J	04	1G	1P
Torque	18-20 NM	18-20 NM	15-16 NM	18-20 NM	18-20 NM
BSP & Metric	G1/4" - 19 External w/ O-Ring*	G1/4" - 19 A Integral Face Seal*	M12 x 1.5 w/ O-Ring*	M12 x 1.5 HP Metal Washer Seal*	G1/4" A Integral Face Seal
Dimensions in Inches					
Fitting Code	01	05	0L	2T	05
Torque	30-35 NM	30-35 NM	28-30 NM	30-35 NM	

*O-Rings are not supplied with pressure fittings.

NOTE: Not all available pressure connectors are shown. Please consult the factory for additional configurations.

Model 32CS

Heavy Duty Intrinsically Safe
CSA Rated Pressure Transducer



ORDERING INFORMATION

3 2 C S - [] - [] [] [] [] - [] [] - [] - [] - [] []

Model	Output	Pressure Range	Pressure Port	Connector		Pressure Restrictor		Cable Length	
32CS=Heavy Duty	See Table 1	See Table 2	See Table 3	6	Amp Superseal 1/5 Series	R	Restrictor	00	Not Fitted
				8	Deutsch DT04-4P	0	No Restrictor	01	1 meter
				9	Metripack T (150 Series)			02	2 meter
				E	M12 x P, 4-Pin			03	3 meter
				G ⁵	EN175301 (DIN43650 A)			05	5 meter
				R	Industry Standard Form C			10	10 meter
				F	Integrated Cable				

Table 1. Output

CODE	Output
B ¹	4-20 mA
C	1-6 V
F	0.1-5.1 V
G ¹	0.2-10.2V
H	1-5 V
N	0.5-4.5 V Non Ratio-metric
P ¹	1-10 V
R	0-5 V
S ¹	0-10 V
T	0.5-4.5 V Ratio-metric
V	0.5-4 V

Table 2. Pressure Range

CODE	BAR	CODE	PSI	CODE	BAR	CODE	PSI
GAUGE				SEALED			
0004G	4	075PG	75	0100S	100	15CPS	1,500
0006G	6	100PG	100	0160S	160	20CPS	2,000
0010G	10	150PG	150	0250S	250	35CPS	3,500
0016G	16	200PG	200	0400S	400	50CPS	5,000
0025G	25	300PG	300	0600S ³	600	10KPS	10,000
0040G	40	500PG	500	1000S ³	1,000	15KPS ³	15,000
0060G	60	10CPG	1,000	1600S ³	1,600	20KPS ³	20,000
				2200S ^{2,3}	2,200	25KPS ³	25,000
						30KPS ^{2,3}	30,000
						32KPS ^{2,3}	32,000

Table 3. Pressure Port

CODE	DESCRIPTION	CODE	DESCRIPTION
0H	1/2" NPT	1J	7/16" - 20 UNF 2A SA1926/2 O'RING
02	1/4" - 18 NPT	1P	9/16" - 18UNF 22 A/F
0E ⁴	1/4" - 18 NPT Female	4P	G1/2" A 27A/F
4C	1/4" - 18 NPTF Dryseal	05	G1/4" A Integral Face Seal
0A	1/4" - 19 PT (JIS) or 1/4" - 19 BSPT	01	G1/4" A Stud (BS 5380 Port)
4B	1/4" Female (7/16UN with Shraeder Deflator)	0S	G1/8" A Stud (BS 5380 Port)
08	1/8" - 27 NPT	2T	M12x1.5 (6g) High Pressure (Washer Seal)
4D	1/8" - 27 NPTF Dryseal	0L	M12x1.5P (6g) O'Ring to ISO 6149-2
4N	3/8" - 24 UNF Union	1G ⁴	Schraeder 7-16" - 20 UN 2B Female
04	7/16" 20 (37FLARE SAE J514 SIZE 4)		

¹Output codes B, G, P, S not available below 100 PSI (7 BAR)

²Ranges above 25 KPS and 1600 BAR only available with 32CS

³Ranges 1000 Bar (15,000 PSI) and above in 32CS and 700 BAR (10,000 PSI) and above in 32CS available with 2T pressure port only

⁴Pressure ports 0E and 1G not available with restrictor option

⁵Vented only (no connector)

Order from: **C A Briggs Company**; 622 Mary Street; Suite 101 - Warminster, PA 18974
Phone: 267-673-8117 - Fax: 267-673-8118; E-Mail: Sales@cabriggs.com - www.cabriggs.com