

LOOP POWERED LOCAL INDICATOR

MODEL LD1001



Model LD1001
Loop Powered Local Indicator

FEATURES:

- 3 1/2 digit display
- Dual relay outputs
- DIN electrical connection
- Internal push button adjust

INPUT:

- 4-20 mA loop powered
- 13 VDC min input


INTERFACE:

- DIN 43650 (Direct mount to GP:50 4-20mA output transmitter with connector option CJ)

APPLICATION:

- The LD1001 plug-on display is a local pressure display with an adjustable set point for use with any GP:50 4-20mA 2 wire transmitter.
- The LD1001 comes factory set* when ordered with an acceptable GP:50 transmitter for easy field installation.

* Includes internal push buttons to manually adjust zero and span, as well as decimal placement and relay set points.

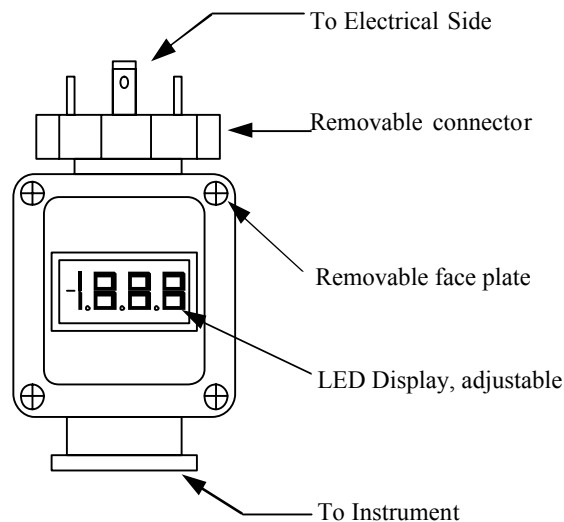

BR5SL-A-009
REV-A